


A collection of red lifting gear is displayed on a white surface. In the foreground, a large metal handle with a circular opening is visible, featuring the 'LLOYD' brand name. To its right, a red hook is attached to a red shackle. Further back, another red shackle is connected to a red handle with a blue and white label. A coiled red rope is also present on the right side of the frame. The background is a solid dark blue color.

HIJSMATERIAAL LIFTING GEAR

Lewis hijsmateriaal G80
Lewis lifting gear G80

Lewis hijsketting / grade 80 / zwart gelakt
Lewis lifting chain / grade 80 / black painted

| EN 818-2
| EN 818-2



DK = diameter ketting
DK = diameter chain


WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

LC = lashing capaciteit
LC = lashing capacity

Artikelnr.	DK	B	b	l	WLL	LC	kg/100m
Part no.	mm	mm	mm	mm	kg	kg	kg/100m
50101006	6	22,2	7,8	18	1.120	2.240	80
50101007	7	25,9	9,1	21	1.500	3.000	110
50101008	8	29,6	10,4	24	2.000	4.000	140
50101010	10	37,0	13,0	30	3.150	6.300	220
50101013	13	48,1	16,9	39	5.300	10.600	380
50101016	16	59,2	20,8	48	8.000	16.000	570
50101020	20	74,0	26,0	60	12.500	25.000	870
50101022	22	81,4	28,6	66	15.000	30.000	1.040
50101026	26	96,2	33,8	78	21.200	42.400	1.470
50101032	32	118,0	41,6	96	31.500	63.000	2.240

Lewis hijsketting / grade 80 / verzinkt
Lewis lifting chain / grade 80 / electro galvanised

| EN 818-2
| EN 818-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

LC = lashing capaciteit
LC = lashing capacity

Artikelnr.	DK	B	b	l	WLL	LC	kg/100m
Part no.	mm	mm	mm	mm	kg	kg	kg/100m
50102006	6	22,2	7,8	18	1.120	2.240	80
50102007	7	25,9	9,1	21	1.500	3.000	110
50102008	8	29,6	10,4	24	2.000	4.000	140
50102010	10	37,0	13,0	30	3.150	6.300	220
50102013	13	48,1	16,9	39	5.300	10.600	380
50102016	16	59,2	20,8	48	8.000	16.000	570

Lewis hijsmateriaal G80

Lewis lifting gear G80

Lewis verbindingschalm / grade 80


| EN 1677-1

Lewis connecting link / grade 80

| EN 1677-1

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	H	h	l	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50301006	L-VS-6	6	7	4,8 x 39,6	7,3	42	15	17	1.120	0,1
50301008	L-VS-7/8	7/8	9	6 x 53,5	9,5	57	22,5	20	2.000	0,16
50301010	L-VS-10	10	10,6	7,8 x 66,8	12,4	68	25,2	28	3.150	0,3
50301013	L-VS-13	13	15	10 x 80	15,3	85,2	29,8	29	5.300	0,7
50301016	L-VS-16	16	20,3	12 x 100	20,6	104	39,8	36,3	8.000	1,15
50301020	L-VS-20	20	23	15 x 118	24	117	44	41	12.500	2,1
50301022	L-VS-22	22	27,3	17 x 145	27,3	138	53	49,5	15.000	2,87
50301026	L-VS-26	26	31,3	20 x 170	31	157	60	57,5	21.200	4,5
50301032	L-VS-32	32	39	24 x 210	39	205	78	67,5	31.500	8,21

Lewis topschalm / 1/2-sprong / grade 80

| EN 1677-4


Lewis masterlink / 1/2 legs / grade 80

| EN 1677-4

DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
50341007	L-76-8	6/7	6	13	60	110	1.600	0,34
50341008	L-87-8	8	7	16	60	110	2.120	0,54
50341010	L-108-8	10	8	18	75	135	3.150	0,82
50341013	L-1310-8	13	10	22	90	160	5.300	1,5
50341016	L-1613-8	16	13	26	100	180	8.000	2,3
50341018	L-1816-8	18	16	32	110	200	11.200	3,95


Lewis hijsmateriaal G80
Lewis lifting gear G80

Lewis topschalm / 3/4-sprong / grade 80
Lewis masterlink / 3/4 legs / grade 80

| EN 1677-4
| EN 1677-4

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50342007	L-7-8	6/7	18	13	75	38	135	50	3.150	1,24
50342008	L-8-8	8	22	16	90	34	160	70	4.250	2,20
50342010	L-10-8	10	26	18	100	40	180	85	6.700	3,40
50342013	L-13-8	13	32	22	110	50	200	115	11.200	6,10
50342016	L-16-8	16	36	26	140	65	260	140	17.000	9,98

Lewis ooghaak / gesmede veiligheidsklep / grade 80
Lewis eye sling hook / forged safety latch / grade 80

| EN 1677-2
| EN 1677-2

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	D1	B	H	h	O	O1	bo	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50402006	L-OH-6	6	10	17	68	22	78	25	19	19,8	1.120	0,3
50402008	L-OH-7/8	7/8	11,5	18,5	83	30	93	28	22	24,5	2.000	0,5
50402010	L-OH-10	10	14,5	24	103	35	117	35	29	33,5	3.150	0,95
50402013	L-OH-13	13	17,5	29	132	40	150	43	35	42	5.300	1,6
50402016	L-OH-16	16	22	35,5	156,5	54	182	51	43	52	8.000	3,1

Lewis hijsmateriaal G80

Lewis lifting gear G80

Lewis gaffelhaak / gesmede veiligheidsklep / grade 80 | EN 1677-2

Lewis clevis sling hook / forged safety latch / grade 80 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)


Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50401006	L-GH-6	6	15	7,7 x 17	68	6,8	22	70	25	19	1.120	0,25
50401008	L-GH-7/8	7/8	19	9 x 23,2	87,4	9	27,8	85	30,5	24	2.000	0,55
50401010	L-GH-10	10	25	12,5 x 29,6	106,7	12,3	34	107	37,8	30	3.150	1,2
50401013	L-GH-13	13	29,7	16 x 38,9	130	14,3	42	132	48,6	38	5.300	2,1
50401016	L-GH-16	16	38	19,7 x 48,8	155,5	17,2	49	153	54	44	8.000	3,3

Lewis self-locking haak / gaffel / grade 80

| EN 1677-3

Lewis clevis self-locking hook / grade 80

| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50601006	L-SG-6	6	15	7,6x22,2	70	7	21	97	30	1.120	0,5
50601008	L-SG-7/8	7/8	19	8,9x26,6	89	9	28	115	40	2.000	0,8
50601010	L-SG-10	10	26	13x32,8	108	12	29	141	51	3.150	1,5
50601013	L-SG-13	13	32	16x41,3	137	14,8	43	177	68	5.300	2,8
50601016	L-SG-16	16	38	20x52,6	170	17,2	51	205	77	8.000	5,6


Lewis hijsmateriaal G80
Lewis lifting gear G80

Lewis wartelhaak / klep / gelagerd / grade 80 | EN 1677-2
Lewis swivel hook / safety latch / bearing / grade 80 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	B	b	R	E	F	G	H	L	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50404006	L-WK-6	6	72	29	136	11	33	16	20	166	25	1.120	0,65
50404008	L-WK-7/8	7/8	88	42	165	14	36	21	25	205	26	2.000	0,95
50404010	L-WK-10	10	105	50	204	17	42	23	31	252	31	3.150	1,71
50404013	L-WK-13	13	135	58	242	19	50	32	40	296	38	5.300	2,97
50404016	L-WK-16	16	160	62	280	24	60	38	45	357	43	8.000	5,3
50404020	L-WK-18/20	18/20	191	90	356	25	74	49	50	434	56	12.500	9,5

Lewis inkortklauw / gaffel / grade 80 | EN 1677-1
Lewis clevis shortening clutch / grade 80 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	PxL	B	bg	C	E	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50503006	L-KG-6	6	7,5x16,8	33	7	7	12	73	48	7	1.120	0,25
50503008	L-KG-7/8	7/8	9x24	45	9	9	17	101	66	9	2.000	0,41
50503010	L-KG-10	10	13x32	55	12,8	12	28	137	89	12,8	3.150	0,98
50503013	L-KG-13	13	16,1x41	75	17	14,8	34	177	116	17	5.300	2

Lewis hijsmateriaal G80

Lewis lifting gear G80

Lewis inkortklauw / gaffel / beveiliging / grade 80 | EN 1677-1


Lewis clevis shortening clutch / safety pawl / grade 80 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	PxL	B	bg	C	E	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50503406	L-KV-6	6	7,5x16,8	40	8	7,5	12	91	54	8,5	1.120	0,6
50503408	L-KV-8	8	9x24	46,5	9,5	11	17	109	69	9,5	2.000	0,90



Lewis inkorthaak / gaffel / grade 80

| EN 1677-1

Lewis clevis grab hook / grade 80


| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50501006	L-IG-6	6	22	7,6x22	46	7	19	44,7	7,8	1.120	0,25
50501008	L-IG-7/8	7/8	32	9x25,3	50	9	20	51,8	10,4	2.000	0,32
50501010	L-IG-10	10	44	12,5x31	71,5	12	30	74	12,5	3.150	0,73
50501013	L-IG-13	13	58	16x38,9	94,5	14,8	43	89	15	5.300	1,6
50501016	L-IG-16	16	66	19,7x41	114	19	46	112	19,2	8.000	2,8




Lewis hijsmateriaal G80
Lewis lifting gear G80

Lewis inkorthaak / gaffel / uitvalbeveiliging / grade 80 | EN 1677-1
Lewis clevis grab hook / safety device / grade 80 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50501406	L-IV-6	6	22	7,6x22	46	7	19	44,7	7,8	1.120	0,25
50501408	L-IV-7/8	7/8	32	9x25,3	50	9	20	51,8	10,4	2.000	0,32
50501410	L-IV-10	10	44	12,5x31	71,5	12	30	74	12,5	3.150	0,73
50501413	L-IV-13	13	58	16x38,9	94,5	14,8	43	89	15	5.300	1,6
50501416	L-IV-16	16	66	19,7x41	114	19	46	112	19,2	8.000	2,8

Lewis inkorthaak / oog / beveiliging / grade 80 | EN 1677-1
Lewis eye grab hook / safety device / grade 80 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	D	B	E	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
50502408	L-IOV-7/8	7/8	10,4	31	50	11	23	43	15	2.000	0,35
50502410	L-IOV-10	10	12,5	40	65	12	30	52	22	3.150	0,60
50502413	L-IOV-13	13	15	50	85	16	37	65	26	5.300	1,3

Lewis hijsmateriaal G80

Lewis lifting gear G80


Lewis glijhaak / grade 80

| EN 1677-2

Lewis glijding choker hook / grade 80

| EN 1677-2

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	A	D	B	E	L	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
50740016	L-G-1.6T	50	17	71	18	132	1.600	0,68
50740020	L-G-2.0T	63,5	22	79	20	151,3	2.000	1,21

Lewis aanlashaak / grade 80

Lewis weld-on hook / grade 80

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	B	C	H	L	M	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
50741001	L-AH-6	25	59,5	76	97	19	25	1.120	0,48
50741002	L-AH-8	34	67	92	114	23,3	26,5	2.000	0,85
50741003	L-AH-10	36	75	106	129	33,6	30,5	3.000	1,12
50741005	L-AH-13	45	94	136	171	44	34,5	5.000	2,50
50741008	L-AH-16	51	94	140	177	44	34,5	8.000	3,2
50741010	L-AH-18	53	135	175	223	54,7	51	10.000	5,2

Lewis hijsmateriaal G80
Lewis lifting gear G80

Lewis hoogwaardig stalen S-haak / gesloten / grade 80
Lewis high tensile S-hook / closed / grade 80



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	D	a	b	do	WLL	kg/stuk
Part no.	mm	mm	mm	mm	kg	kg/piece
39352010	10	80	25	25	200	0,10
39352013	13	100	30	30	300	0,20
39352016	16	130	40	40	500	0,50
39352020	20	180	55	55	1000	1,0

Lewis hoogwaardig stalen S-haak / open / grade 80
Lewis high tensile S-hook / open / grade 80



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	D	a	b	WLL	kg/stuk
Part no.	mm	mm	mm	kg	kg/piece
39351810	10	80	25	200	0,10
39351813	13	100	30	300	0,20
39351816	16	130	40	500	0,50
39351820	20	180	55	1000	1,00

Lewis hijsmateriaal G80

Lewis lifting gear G80

Lewis borgpenset voor Lewis inkorthaak Lewis safety device set for Lewis grab hook

| Inhoud set: pin, veer en borgdop
| Set contains: pin, spring and button

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
50954006	L-BG-6	L-IV-6	6	0,01
50954008	L-BG-7/8	L-IV-7/8	7/8	0,02
50954010	L-BG-10	L-IV-10	10	0,025
50954013	L-BG-13	L-IV-13	13	0,03
50954016	L-BG-16	L-IV-16	16	0,04

Lewis palset voor Lewis self-locking haak Lewis locking device set for Lewis self-locking hook

| Inhoud set: pal, veer en stift
| Set contains: locking devise, spring and pin

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
50953006	L-PS-6	L-SG-6	6	0,03
50953008	L-PS-7/8	L-SG-7/8	7/8	0,04
50953010	L-PS-10	L-SG-10	10	0,06
50953013	L-PS-13	L-SG-13	13	0,10
50953016	L-PS-16	L-SG-16	16	0,14

Lewis hijsmateriaal G80 Lewis lifting gear G80

Lewis reserveset voor Lewis verbindingsschalm Lewis spare set for Lewis connecting link

| Inhoud set: pin en bus
| Set contains: pin and bush

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
50952006	L-PB-6	L-VS-6	6	0,03
50952008	L-PB-7/8	L-VS-7/8	7/8	0,035
50952010	L-PB-10	L-VS-10	10	0,06
50952013	L-PB-13	L-VS-13	13	0,1
50952016	L-PB-16	L-VS-16	16	0,135

Lewis gesmede klepset voor Lewis gaffel- of ooghaak Lewis forged latch set for Lewis sling hook

| Inhoud set: klep, veer en stift
| Set contains: latch, spring and pin

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
50951006	L-KS-6	L-GH-6 & L-OH-6	6	0,03
50951008	L-KS-7/8	L-GH-7/8 & L-OH-7/8	7/8	0,035
50951010	L-KS-10	L-GH-10 & L-OH-10	10	0,06
50951013	L-KS-13	L-GH-13 & L-OH-13	13	0,1
50951016	L-KS-16	L-GH-16 & L-OH-16	16	0,135

Lewis hijsmateriaal G80

Lewis lifting gear G80

Lewis gesmede klepset voor Lewis aanlashaak
Lewis forged latch set for Lewis weld-on hook

| Inhoud set: klep, veer en stiften
| Set contains: latch, spring and pins



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
50951401	L-KA-6	L-AH-6	0,04
50951402	L-KA-8	L-AH-8	0,09
50951403	L-KA-10	L-AH-10	0,14
50951405	L-KA-13	L-AH-13	0,33
50951408	L-KA-16	L-AH-16	0,33
50951410	L-KA-18	L-AH-18	0,56

Identificatieplaatje / grade 80

Identification tag / grade 80



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
50955010	zonder ring / without ring	leng / 1 leg	0,12
50955020	zonder ring / without ring	2-3-4 sprong / 2-3-4 legs	0,12
50955030	met ring / with ring	leng / 1 leg	0,15
50955040	met ring / with ring	2-3-4 sprong / 2-3-4 legs	0,15
50955050	losse ring / ring only		0,03

Lewis hijsmateriaal G100 Lewis lifting gear G100


Lewis hijsketting / grade 100 / blauw gelakt
Lewis lifting chain / grade 100 / blue painted

| EN 818-2
| EN 818-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
52101006	6	22,2	7,8	18	1.400	80
52101008	8	29,6	10,4	24	2.500	151
52101010	10	37,0	13,0	30	4.000	240
52101013	13	48,1	16,9	39	6.700	400
52101016	16	59,2	20,8	48	10.000	600


Lewis verbindingschalm / grade 100
Lewis connecting link / grade 100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	H	h	l	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52301006	L-VSC-6	6	7	5,1 x 39,6	8,5	44,5	15	14	1.400	0,08
52301008	L-VSC-8	8	10	6,2 x 53,5	10,5	63	22,5	18,5	2.500	0,18
52301010	L-VSC-10	10	12,6	8,0 x 66,8	12,6	71	25,2	23	4.000	0,34
52301013	L-VSC-13	13	16,5	10,2 x 80	16,5	92,5	29,8	28	6.700	0,68
52301016	L-VSC-16	16	20	12,5 x 100	20	106,5	39,8	33,5	10.000	1,22

Lewis hijsmateriaal G100


Lewis lifting gear G100

Lewis topschalm / 1/2-sprong / grade 100

| EN 1677-4

Lewis masterlink / 1/2 legs / grade 100

| EN 1677-4

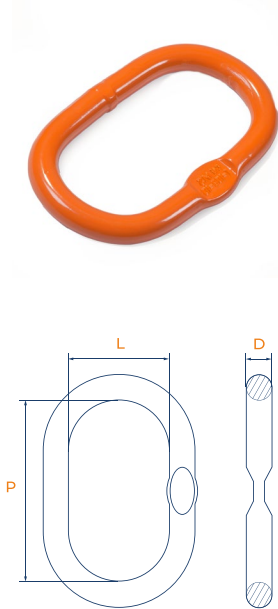

DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)


Artikelnr.	Type	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
52341007	L-76-10	6/7	6	13	60	110	2.300	0,34
52341008	L-87-10	8	7	16	60	110	3.500	0,53
52341010	L-108-10	10	8	18	75	135	5.000	0,86
52341013	L-1310-10	13	10	22	90	160	7.600	1,6
52341016	L-1613-10	16	13	27	100	180	10.000	2,46
52341019	L-1916-10	19	16	33	110	200	14.000	4,14

Lewis topschalm / 3/4-sprong / grade G100

| EN 1677-4

Lewis masterlink / 3/4 legs / grade G100

| EN 1677-4

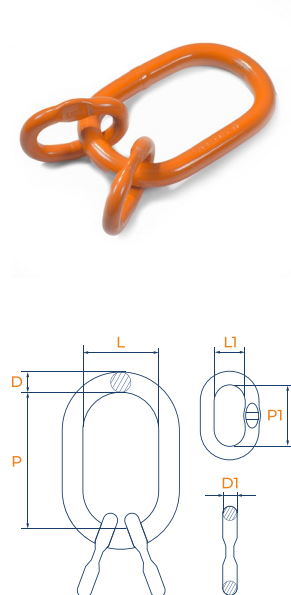

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52342006	L-6-10	6	18	14	75	25	135	54	3.000	1,26
52342008	L-8-10	8	22	16	90	34	160	70	5.300	2,19
52342010	L-10-10	10	27	18	100	40	180	85	8.400	3,60
52342013	L-13-10	13	33	22	110	50	200	115	14.000	6,35
52342016	L-16-10	16	36	28	140	65	260	140	21.200	9,98


Lewis hijsmateriaal G100
Lewis lifting gear G100

Lewis ooghaak / gesmede veiligheidsklep / grade 100 | EN 1677-2
Lewis eye sling hook / forged safety latch / grade 100 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	D1	B	H	h	O	O1	bo	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52402006	L-OHC-6	6	10	16,5	68	21	80	25	18,5	20,5	1.400	0,32
52402008	L-OHC-8	8	11	17	87	27	99	28	25	25	2.500	0,6
52402010	L-OHC-10	10	16	24	105	33	106	35	29,5	32	4.000	1,2
52402013	L-OHC-13	13	19	33	138	43,5	156	43	38	43	6.700	2,2
52402016	L-OHC-16	16	24	40	158	50	185	51	46	51	10.000	3,5

Lewis gaffelhaak / gesmede veiligheidsklep / G100 | EN 1677-2
Lewis clevis sling hook / forged safety latch / G100 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52401006	L-GHC-6	6	16,5	7,6 x 30	68,5	7,5	21	73	25	17	1.400	0,33
52401008	L-GHC-8	8	17	9,8 x 34	88	9,5	27,5	88,5	30,5	23	2.500	0,6
52401010	L-GHC-10	10	24	13 x 46	102	12,5	32	105	37,8	29	4.000	1,3
52401013	L-GHC-13	13	34	15,8 x 57	134	15	42	132	48,6	38	6.700	2,3
52401016	L-GHC-16	16	38	19,5 x 68	160,5	18,5	50	161	54	46	10.000	3,6

Lewis hijsmateriaal G100

Lewis lifting gear G100

Lewis self-locking haken / gaffel / grade 100

| EN 1677-3


Lewis clevis self-locking hook / grade 100

| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52601006	L-SGC-6	6	15	7,6x30	73	8	19,5	96	31,5	1.400	0,5
52601008	L-SGC-8	8	20	9,8x34	90	9,5	25,5	121	40	2.500	0,9
52601010	L-SGC-10	10	26	13x44	108	12	29,5	144	46	4.000	1,4
52601013	L-SGC-13	13	32,5	15,8x57	137	15	39,5	182	66	6.700	2,9
52601016	L-SGC-16	16	38	19,5x68	168	18,5	50	220	75	10.000	5,5

Lewis inkorthaak / gaffel / grade 100

| EN 1677-1


Lewis clevis grab hook / grade 100

| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52501006	L-IGC-6	6	25,5	7,6x30	46,5	7,5	18	44,5	8	1.400	0,22
52501008	L-IGC-8	8	38,5	9,8x34	54	9,5	22	53	11	2.500	0,34
52501010	L-IGC-10	10	42	13x44	72	12,5	31	73	13,5	4.000	0,82
52501013	L-IGC-13	13	53,5	15,8x57	96	15	45,5	92	15	6.700	1,75
52501016	L-IGC-16	16	74	19,5x68	115	18,5	48,4	103	19	10.000	2,88

Kito hijsmateriaal G80
Kito lifting gear G80

Kito hijsketting / grade 80 / zwart gelakt
Kito lifting chain / grade 80 / black painted

| EN 818-2
| EN 818-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
39051006	6	22,2	7,8	18	1.120	80
39051007	7	25,9	9,1	21	1.500	110
39051008	8	29,6	10,4	24	2.000	140
39051010	10	37,0	13,0	30	3.150	220
39051013	13	48,1	16,9	39	5.300	380
39051016	16	59,2	20,8	48	8.000	570
39051018	18	66,6	23,4	54	10.000	730
39051020	20	74,0	26,0	60	12.500	900
39051022	22	81,4	28,6	66	15.000	1.090
39051026	26	96,2	33,8	78	21.200	1.520
39051032	32	118,0	41,6	96	31.500	2.300

Kito hijsketting / grade 80 / Weissgard
Kito lifting chain / grade 80 / Weissgard

| EN 818-2
| EN 818-2




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
39052006	6	22,2	7,8	18	1.120	80
39052007	7	25,9	9,1	21	1.500	110
39052008	8	29,6	10,4	24	2.000	140
39052010	10	37,0	13,0	30	3.150	220
39052013	13	48,1	16,9	39	5.300	380
39052016	16	59,2	20,8	48	8.000	570

Kito hijsmateriaal G80
Kito lifting gear G80

Kito takelketting / grade 80 / electrolytisch verzinkt | EN 818-7
Kito hoist chain / grade 80 / electro galvanised | EN 818-7



DK = diameter ketting
DK = diameter chain


tl = tolerantie lengte
tl = tolerance length

td = tolerantie diameter
td = tolerance diameter

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	tl	td	I	WLL	kg/100m
Part no.	mm	mm	mm	mm	mm	mm	kg	kg/100m
3905400412	4	13,6	4,8	+0.15/-0.10	+/- 0.2	12,0	500	36
3905400515	5	17,0	6,0	+0.2/-0.10	+/- 0.2	15,0	750	54
3905400618	6	20,4	7,2	+0.2/-0.10	+/- 0.2	18,0	1.150	80
390540063191	6,3	22,0	7,8	+0.37/-0	+/- 0.3	19,1	1.300	87
3905400721	7	23,8	8,4	+0.25/-0.15	+/- 0.3	21,0	1.500	110
39054007212	7,1	25,0	8,8	+0.41/-0	+/- 0.3	21,2	1.600	112
3905400824	8	27,2	9,6	+0.35/-0.15	+/- 0.3	24,0	2.000	140
3905400927	9	30,6	10,8	+0.35/-0.15	+/- 0.4	27,0	2.500	177
3905401030	10	34,0	12,0	+0.4/-0.2	+/- 0.4	30,0	3.200	219

Kito verbindingsschalm / grade 80 | EN 1677-1
Kito connecting link / grade 80 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	PxL	R	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
39101006	WA-58	6	4,8x39	44	7,6	7,8	14	1.120	0,07
39101007	WA-60	7	6x47	51	9	10	17	1.500	0,12
39101008	WA-59	8	6,3x53	61,5	10	11,5	18	2.000	0,19
39101010	WA-61	10	8x63	72	12,6	12,6	22,5	3.150	0,34
39101013	WA-62	13	10x79	88	16,7	19	27,5	5.300	0,73
39101016	WA-63	16	14x106	103	21	21	33	8.000	1,43
39101020	WA-64	20	16x126	115	23,5	29,5	41,5	12.500	2,65
39101022	WA-65	22	16x146	135	27	29	48,5	15.000	3,21
39101026	WA-66	26	18x159	147	31,5	31,5	60	21.200	4,30
39101032	WA-67	32	25x195	194	32	40	80	31.500	8,05

Kito hijsmateriaal G80
Kito lifting gear G80


Kito omega-schalm / grade 80
Kito omega shackle / grade 80

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	PxL	C	F	G	H	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39103008	BG 7-8	7/8	8,7	9,5x33,5	24	32	11	18	2.000	0,18
39103010	BG 10	10	12,5	13x43,5	32	44	14	19	3.150	0,35
39103013	BG 13	13	15	17x57	40	55	17	25	5.300	0,72
39103016	BG 16	16	19	21x69	50	65	22	30	8.000	1,20


Kito verbindingsschalm voor hijsbanden / grade 80
Kito connecting link for webbing / grade 80

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	R	E	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39102007	CLS-7/8	7/8	40	58	24	9	10	17	2.000	0,28
39102010	CLS-10	10	40	81	30	11	13	23	3.150	0,47
39102013	CLS-13	13	55	104	36	16	16	28	5.300	0,99

Kito hijsmateriaal G80
Kito lifting gear G80


Kito topschalm / 1/2-sprong / grade 80
Kito masterlink / 1/2 legs / grade 80

| EN 1677-4
| EN 1677-4

DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
39152007	WA-180 OF	6/7	6	13	60	110	1.600	0,32
39152008	WA-181 OF	8	7	16	60	110	2.120	0,60
39152010	WA-182 OF	10	8	19	75	135	3.150	0,80
39152013	WA-183 OF	13	10	23	90	160	5.300	1,50
39152016	WA-184 OF	16	13	27	100	180	8.000	2,32
39152020	WA-186 OF	20	18	36	140	260	14.000	6,35
39152022	WA-187 OF	22	20	40	160	300	17.000	9,00
39152026	WA-188 OF	26	22	45	180	340	21.200	12,80
39152032	WA-189 OF	32	26	50	190	350	31.500	17,20
39152036	WA-190 OF	36	32	60	200	400	45.000	27,01

Kito topschalm / 3/4-sprong / grade 80
Kito masterlink assembly / 3/4 legs / grade 80

| EN 1677-4
| EN 1677-4

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	S	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	mm	kg/piece
39153007	W7-8	7	19	13	75	38	135	60	3.150	8	1,16
39153008	W8-8	8	23	16	90	34	160	70	4.250	8	2,32
39153010	W10-8	10	27	18	100	40	180	85	6.700	11,5	3,58
39153013	W13-8	13	33	23	110	50	200	115	11.200	14	6,57
39153016	W16-8	16	36	27	140	65	260	140	17.000	18	10,3
39154018	W18-8	18	40	33	180	70	340	150	21.200	-	16,5
39154020	W20-8	20	45	33	180	70	340	150	26.500	-	19,3
39154022	W22-8	22	50	36	190	75	350	170	31.500	-	25,1
39154026	W26-8	26	56	40	200	80	400	170	45.000	-	34,3

Kito hijsmateriaal G80
Kito lifting gear G80

Kito DNV topschalm / 1/2-sprong / grade 80
Kito DNV masterlink / 1/2 legs / grade 80

| DNV 2.7-1 / EN 1677-4 / EN 12079-2
| DNV 2.7-1 / EN 1677-4 / EN 12079-2

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	kg	kg/piece
39158023	F22	23	140	270	6.700	2,5
39158025	F25	25	140	270	8.900	3,0
39158027	F28	27	140	270	14.500	3,5
39158033	F32	33	140	270	24.150	5,4
39158036	F36	36	270	140	28.910	6,5
39158040	F40	40	150	275	34.290	8,3
39158045	F45	45	180	340	38.300	12,8
39158050	F50	50	190	350	50.560	16,5
39158060	F60	60	230	430	67.000	29,10
39158070	F70	70	260	480	85.000	44,60

Kito DNV topschalm / 3/4-sprong / grade 80
Kito DNV masterlink / 3/4 legs / grade 80

| DNV 2.7-1 / EN 1677-4 / EN 12079-2
| DNV 2.7-1 / EN 1677-4 / EN 12079-2

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
39158423	F22M16	23	17	140	80	270	140	6.700	4,0
39158425	F25M18	25	19	140	75	270	135	8.900	4,8
39158427	F28M20	27	20	140	75	270	135	11.800	5,7
39158433	F32M26	33	27	140	100	270	180	17.100	10,4
39158436	F36M30	36	30	140	110	270	190	24.100	13,1
39158440	F40M32	40	33	150	110	275	200	16.700	28,1
39158445	F45M36	45	36	180	125	340	225	38.300	24,00
39158450	F50F40	50	40	190	150	350	275	45.000	33,1
39158460	F60F50	60	50	230	190	430	350	67.000	62,1
39158470	F70M56	70	56	260	200	480	400	85.000	91,2


Kito hijsmateriaal G80

Kito lifting gear G80

Kito ooghaak / gesmede veiligheidsklep / grade 80 | EN 1677-2
Kito eye sling hook / forged safety latch / grade 80 | EN 1677-2

DK = diameter ketting
 DK = diameter chain

WLL = veilige belasting (4:1)
 WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	R	E	F	G	H	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39201006	WA-29U	6	18	84,5	10	20	16,5	21	25	19	1.120	0,24
39201008	WA-30U	7/8	24	106	11	25	19	27	32	25	2.000	0,56
39201010	WA-31U	10	30	131	16	34	26	33	40	31	3.150	1,20
39201013	WA-32U	13	38	164	19	43	33	42	48	39	5.300	2,35
39201016	WA-33U	16	44	182,5	25	50	40	50	55	45	8.000	3,72
39201020	WA-34U	20	53	205	27	55	48	54	61	54	12.500	5,95
39201022	WA-35U	22	60	225	30	60	50	61	71	61	15.000	7,87
39201026	CA-26	26	72	237	35	70	60	75	77	73	21.200	12,0
39201032	CA-32	32	86	259	39	76	71	89	95	87	31.500	22,0

Kito gaffelhaak / gesmede veiligheidsklep / grade 80 | EN 1677-2
Kito clevis sling hook / forged safety latch / grade 80 | EN 1677-2

DK = diameter ketting
 DK = diameter chain

WLL = veilige belasting (4:1)
 WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	D	PxL	R	G	H	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39202006	WA-79U	6	7	18	7,4x16,5	69	16,5	20	25	19	1.120	0,27
39202008	WA-80U	7/8	9	25	9,6x23	94,5	19	28	32	26	2.000	0,61
39202010	WA-81U	10	11,5	30	12,5x29,5	109	25	33	39	31	3.150	1,12
39202013	WA-82U	13	14,5	38	16x37	135	30	40	48	39	5.300	2
39202016	WA-83U	16	17,5	44	20x52	155	37	47	55	45	8.000	3,4
39202020	WA-84U	20	23	52	24x73	183	51	52	61	53	12.500	6,8
39202022	CB-22	22	24,5	61	27x71	212	50	62	72	62	15.000	8,8
39202026	CB-26	26	30	74	30x78	230	60	75	77	73	21.200	13,5

Kito hijsmateriaal G80
Kito lifting gear G80


Kito self-locking haak / oog / grade 80
Kito eye self-locking hook / grade 80

| EN 1677-3
| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	R	E	F	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39252006	SNE-6	6	35	110	11	21	16	20,5	28	1.120	0,53
39252008	SNE-7/8	7/8	43,5	136	12	27	20	26	34	2.000	0,89
39252010	SNE-10	10	56	168,5	15	34,5	24,5	30	45	3.150	1,58
39252013	SNE-13	13	69	205	20	40	34,5	40	51,5	5.300	3,16
39252016	SNE-16	16	80	251,5	27	50	35,5	50	60	8.000	6,05
39252020	CRO-20	20	90	290	30	60	60	67	70	12.500	9,8
39252022	CRO-22	22	100	322	32	70	62	70	80	15.000	14,4


Kito self-locking haak / gaffel / grade 80
Kito clevis self-locking hook / grade 80

| EN 1677-3
| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	A	D	PxL	R	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39254006	SNC-6	6	6,7	35	7,5x17,5	94	16	21	28	1.120	0,5
39254008	SNC-7/8	7/8	8,5	43,5	9x22,5	123	20	26	34	2.000	0,93
39254010	SNC-10	10	12	56	13x31,5	143	24,5	30	45	3.150	1,58
39254013	SNC-13	13	15	69	16x42	180	34,5	40	51,5	5.300	3,2
39254016	SNC-16	16	19	80	21x51,5	217	35,5	50	60	8.000	5,95
39254020	CRF-20	20	23	90	24x73	253	60	67	70	12.500	9,8
39254022	CRF-22	22	26	100	26x72	287	62	70	82	15.000	14,4

Kito hijsmateriaal G80
Kito lifting gear G80

Kito inkorthaak / oog / grade 80
Kito eye grab hook / grade 80

| EN 1677-1
| EN 1677-1




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	A	D	R	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39302008	WA-40	7/8	10	10	60	30	24	16	2.000	0,23
39302010	WA-41	10	13	11	80	44	31	21	3.150	0,59
39302013	WA-42	13	17	16	104	53	38	26	5.300	1,24
39302016	WA-43	16	20	19	114	64	44	30	8.000	2,01
39302020	WA-44	20	23	22	132	85	53	36	12.500	3,75
39302022	WA-45	22	27	25	157	97	62	38	15.000	5,35
39302026	CD-26	26	30,5	36	213	100	90	55	21.200	13

Kito inkorthaak / gaffel / grade 80
Kito clevis grab hook / grade 80

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	A	PxL	B	R	C	G	H	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39301008	WA-90	7/8	10	9x22,5	9	50	10	30	24	2.000	0,27
39301010	WA-91	10	13	13x31,5	13	72	14	44	31	3.150	0,75
39301013	WA-92	13	17	16x42	17	88	17	53	38	5.300	1,35
39301016	WA-93	16	20	21x51,5	21	102	20	64	44	8.000	2,3
39301020	WA-94	20	24	24x61,5	24	117	24	85	53	12.500	4,1
39301022	WA-95	22	26	26x72	26	139	26	97	62	15.000	5,65
39301026	CF-26	26	30,5	30x80	30	190,5	35	100	90	21.200	13,5


Kito hijsmateriaal G80
Kito lifting gear G80

Kito inkortklauw / gaffel / grade 80
Kito clevis shortening clutch / grade 80

| EN 1677-1
| EN 1677-1

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	A	D	PxL	B	C	E	F	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39303006	CX-6	6	8	8	7,5x17,5	8	10	19	45	1.120	0,21
39303008	CX-7/8	7/8	9,5	9,5	10x22,5	9,5	10	23,5	56	2.000	0,48
39303010	CX-10	10	12	12	13x31,5	12	14,5	32,5	78	3.150	1,12
39303013	CX-13	13	15,5	15,5	16x42	15,5	18	44	90	5.300	1,83
39303016	CX-16	16	19	19	21x51,5	19	21	50	106	8.000	2,83

Kito gieterijhaak / grade 80
Kito foundry hook / grade 80

| EN 1677-1
| EN 1677-1

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	R	E	F	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
39351008	FHE-7/8	7/8	122,5	13,5	18	26	31	63	2.000	1,13
39351010	FHE-10	10	149	16	22	32	36	77	3.150	2,0
39351013	FHE-13	13	173,5	19	27	39	43	88	5.300	3,3
39351016	FHE-16	16	205	24	32	45	50	100	8.000	5,3
39351020	FHE-19/20	20	237	27	38	51	61	115	12.500	7,7
39351022	FHE-22	22	250	31	48	67	72,5	127	15.000	14,0

Kito hijsmateriaal G80

Kito lifting gear G80

Kito gesmede klepset voor Kito haak Kito forged latch set for Kito sling hook

| Inhoud set: klep, veer en stift
| Set contains: latch, spring and pin



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
40801006	FSL-6	WA-29U & WA-79U - SHE-6 & SHC-6	0,03
40801008	FSL-7/8	WA-30U & WA-80U - SHE-7/8 & SHC-7/8	0,04
40801010	FSL-10	WA-31U & WA-81U - SHE-10 & SHC-10	0,06
40801013	FSL-13	WA-32U & WA-82U - SHE-13 & SHC-13	0,10
40801016	FSL-16	WA-33U & WA-83U - SHE-16 & SHC-16	0,14
40801020	FSL-20	WA-34U & WA-84U - SHE-19/20 & SHC-19/20	0,32
40801022	FSL-22	WA-35U & WA-85U - SHE-22 & SHC-22	0,48

Kito palset voor Kito self-locking haak Kito locking devise set for Kito self locking hook

| Inhoud set: pal, veer en stift
| Set contains: locking devise, spring and pin



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
40802006	LDN-6	SNE/SNC-6 & SKE/SKC/SKS-6	0,03
40802008	LDN-7/8	SNE/SNC-7/8 & SKE/SKC/SKS-7/8	0,04
40802010	LDN-10	SNE/SNC-10 & SKE/SKC/SKS-10	0,06
40802013	LDN-13	SNE/SNC-13 & SKE/SKC/SKS-13	0,10
40802016	LDN-16	SNE/SNC-16 & SKE/SKC/SKS-16	0,14

Kito hijsmateriaal G100
Kito lifting gear G100

Kito hijsketting / grade 100 / blauw gelakt
Kito lifting chain / grade 100 / blue painted

| EN 818-2
| EN 818-2




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
40051006	6	22,2	7,8	18	1.400	83,00
40051007	7	25,9	9,1	21	1.900	117,00
40051008	8	29,6	10,4	24	2.500	151,00
40051010	10	37,0	13,0	30	4.000	240,00
40051013	13	48,1	16,9	39	6.700	400,00
40051016	16	59,2	20,8	48	10.000	600,00
40051019	19	70,3	24,7	57	14.000	871,00
40051020	20	74	26	60	16.000	921,00
40051022	22	81,4	28,6	66	19.000	1140,00

Kito verbindingsschalm / grade 100
Kito connecting link / grade 100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	PxL	R	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
40101006	WLK-6	6	4,8x39	44,0	7,6	7,8	14,0	1.400	0,07
40101007	WLK-7	7	6x47	51,0	9,0	10,0	17,0	1.900	0,12
40101008	WLK-8	8	6,3x53	61,5	10,0	11,5	18,0	2.500	0,19
40101010	WLK-10	10	8x63	72,0	12,6	12,6	22,5	4.000	0,34
40101013	WLK-13	13	10x79	88,0	16,7	19,0	27,5	6.700	0,73
40101016	WLK-16	16	14x106	103,0	21,0	21,0	33,0	10.000	1,43
40101020	WLK-19/20	19/20	16x126	115,0	23,5	29,5	41,5	16.000	2,45
40101022	WLK-22	22	16x146	135,0	27,0	29,0	48,5	19.000	3,21
40101026	WLK-26	26	19x165	171,0	30,0	32,0	56,0	26.500	5,70


Kito hijsmateriaal G100
Kito lifting gear G100

Kito verbindingsschalm voor hijsbanden / grade 100 | EN 1677-1
Kito connecting link for webbing / grade 100 | EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	R	E	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40102008	WCL-8	8	30	66	18	10	11,5	18	2.500	0,3
40102010	WCL-10	10	40	81	22	13	12,6	22,5	4.000	0,5
40102013	WCL-13	13	50	104	28	16,7	19	27,5	6.700	1,1
40102016	WCL-16	16	65	112,5	40	21	21	33	10.000	2


Kito topschalm / 1/2-sprong / grade 100 | EN 1677-4
Kito masterlink / 1/2 legs / grade 100 | EN 1677-4



DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
40151007	D13	6/7	6	13	60	110	2.400	0,34
40151008	D16	8	7	16	60	110	3.400	0,53
40151010	D18	10	8	19	75	135	5.050	0,92
40151013	D22	13	10	23	90	160	6.950	1,60
40151016	D26	16	13	27	100	180	12.000	2,50
40151020	D32	19/20	16	33	110	200	18.000	4,20
40151022	D38	22	19/20	38	150	275	27.700	7,50
40151026	D45	26	22	45	180	340	36.000	12,8
40151032	D50	32	26	50	190	350	47.000	16,5
40151036	D60	36	32	56	190	350	60.000	23,3

Kito hijsmateriaal G100
Kito lifting gear G100

Kito topschalm / 3/4-sprong / grade 100


| EN 1677-4

Kito masterlink assembly / 3/4 legs / grade 100

| EN 1677-4

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40153007	D18L13	6/7	19	13	75	38	135	60	5.050	1,38
40153008	D22L16	8	23	16	90	34	160	70	6.950	2,38
40153010	D26L20	10	27	19	100	40	180	85	10.400	3,81
40153013	D32L22	13	33	23	110	50	200	115	18.000	6,57
40153016	D38L26	16	38	27	150	65	275	140	27.700	11,45
40153020	D50L32	19/20	50	33	190	70	350	150	41.550	23,00
40153022	D56L36	22	56	36	250	75	350	170	50.250	31,00

Kito topschalm / 3/4-sprong / grote ringen / grade 100


| EN 1677-4

Kito masterlink / 3/4 legs / big links / grade 100

| EN 1677-4

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	S	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	mm	kg/piece
40155007	D18E14	7	19	15	75	70	135	120	5.050	8	1,94
40155008	D22E16	8	23	17	90	80	160	140	6.950	8	3,12
40155010	D26E20	10	27	20	100	95	180	160	10.400	11,5	4,92
40155013	D32E26	13	33	27	110	110	200	190	18.000	14	9,50
40155016	D38E32	16	38	33	150	130	275	230	27.700	18	17,00
40155020	E50D38	19/20	50	38	190	150	350	275	41.550	-	32,60
40155022	D56D45	22	56	45	250	180	350	340	50.250	-	48,10

Kito hijsmateriaal G100
Kito lifting gear G100

Kito topschalm / connector / leng / grade 100

| EN 1677-4


Kito masterlink / connecting link / 1 leg / grade 100

| EN 1677-4



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	L	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
4015801006	D13CR1	6	13	60	110	141	1.400	0,43
4015801008	D16CR1	7/8	16	60	110	151	2.500	0,77
4015801010	D18CR1	10	19	75	135	185	4.000	1,36
4015801013	D22CR1	13	23	90	160	223	6.700	2,45
4015801016	D26CR1	16	27	100	180	256	10.000	4,00

Kito topschalm / connector / 2-sprong / grade 100


| EN 1677-4

Kito masterlink / connecting link / 2 legs / grade 100

| EN 1677-4



DK = diameter ketting
DK = diameter chain




Artikelnr.	Type	DK	D	L	P	P1	WLL kg	WLL kg	kg/stuk
Part no.		mm	mm	mm	mm	mm	0°<β<45°	45°<β<60°	kg/piece
4015802006	D13CR2	6	13	60	110	141	2.000	1.400	0,52
4015802008	D18CR2	7/8	19	75	135	176	3.550	2.500	1,40
4015802010	D22CR2	10	23	90	160	210	5.600	4.000	2,47
4015802013	D26CR2	13	27	100	180	244	9.500	6.700	4,20
4015802016	D32CR2	16	33	110	200	276	14.000	10.000	7,26

Kito hijsmateriaal G100 Kito lifting gear G100

Kito topschalm / connector / 3/4-sprong / grade 100 | EN 1677-4
Kito masterlink / connecting link / 3/4 legs / grade 100 | EN 1677-4

DK = diameter ketting
DK = diameter chain




Artikelnr.	Type	DK	D	L	P	P1	WLL kg	WLL kg	kg/stuk
Part no.		mm	mm	mm	mm	mm	0°β<math><45^\circ</math>	45°β<math><60^\circ</math>	kg/piece
4015803006	D18L13CR	6	19	75	135	225	3.000	2.120	1,70
4015803008	D22L16CR	7/8	23	90	160	272	5.300	3.750	3,30
4015803010	D26L20CR	10	27	100	180	314	8.400	6.000	5,50
4015803013	D32L22CR	13	33	110	200	378	14.000	10.000	9,90
4015803016	D36L26CR	16	36	140	260	475	21.200	15.000	16,40

Kito topschalm / inkorthaak / leng / grade 100 | EN 1677-4
Kito masterlink / shortening hook / 1 leg / grade 100 | EN 1677-4

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	L	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
4015821006	D13G1I	6	13	60	110	198	1.400	0,61
4015821008	D16G1I	7/8	16	60	110	227	2.500	1,14
4015821010	D18G1I	10	19	75	135	283	4.000	2,12
4015821013	D22G1I	13	23	90	160	345	6.700	4,17
4015821016	D26G1I	16	27	100	180	412	10.000	7,40

Kito hijsmateriaal G100
Kito lifting gear G100

Kito topschalm / inkorthaak / 2-sprong / grade 100 | EN 1677-4
Kito masterlink / shortening hook / 2 legs / grade 100 | EN 1677-4


DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	DK	D	L	P	P1	WLL kg	WLL kg	kg/stuk
Part no.		mm	mm	mm	mm	mm	0°<β<45°	45°<β<60°	kg/piece
4015822006	D13G12	6	13	60	110	198	2.000	1.400	0,88
4015822008	D18G12	7/8	19	75	135	252	3.550	2.500	2,15
4015822010	D22G12	10	23	90	160	308	5.600	4.000	4,00
4015822013	D26G12	13	27	100	180	365	9.500	6.700	7,64
4015822016	D32G12	16	33	110	200	432	14.000	10.000	14,00

Kito topschalm / inkorthaak / 3/4-sprong / grade 100 | EN 1677-4
Kito masterlink / shortening hook / 3/4 legs / grade 100 | EN 1677-4

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	DK	D	L	P	P1	WLL kg	WLL kg	kg/stuk
Part no.		mm	mm	mm	mm	mm	0°<β<45°	45°<β<60°	kg/piece
4015823006	D18L13GI	6	19	75	135	283	3.000	2.120	2,46
4015823008	D22L16GI	7/8	23	90	160	347	5.300	3.750	4,80
4015823010	D26L20GI	10	27	100	180	413	8.400	6.000	8,60
4015823013	D32L22GI	13	33	110	200	500	14.000	10.000	16,80
4015823016	D38L26GI	16	38	150	275	647	21.200	15.000	31,00

Kito hijsmateriaal G100
Kito lifting gear G100

Kito kraanhaakschalm / leng / grade 100

| Voor haak no. 25 DIN 15401

Kito masterlink for crane hook / 1 leg / grade 100


| For hook no. 25 DIN 15401

DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK-1	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40157008	CM22L13S	6/7/8	23	13	180	38	340	60	2.500	3,40
40157010	CM26L16S	10	27	16	180.	34	340.	70	4.000	4,70



Kito kraanhaakschalm / 2/3/4-sprong / grade 100

| Voor haak no. 25 DIN 15401

Kito masterlink for crane hook / 2/3/4 legs / grade 100


| For hook no. 25 DIN 15401

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK-2	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40156008	CM22L13D	6/7/8	23	13	180	34	340	60	3.550	3,50
40156010	CM26L16D	10	27	16	180	34	340	70	5.600	5,10
40156013	CM32L20D	13	33	19	180	40	340	85	9.500	8,00
40156016	CM40L22D	16	40	23	180.	50	340.	115	14.000	12,30




Kito hijsmateriaal G100
Kito lifting gear G100

Kito ooghaak / gesmede veiligheidsklep / grade 100 | EN 1677-2
Kito eye sling hook / forged safety latch / grade 100 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	R	E	F	G	H	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40201006	SHE-6	6	18	84,5	10	20	16	21	25	19	1.400	0,33
40201008	SHE-7/8	7/8	24	106	11	25	19	27	32	25	2.500	0,56
40201010	SHE-10	10	30	131	16	34	26	33	40	31	4.000	1,20
40201013	SHE-13	13	38	164	19	43	33	42	48	39	6.700	2,35
40201016	SHE-16	16	44	183	25	50	40	50	55	45	10.000	3,72
40201020	SHE-19/20	19/20	53	205	27	55	48	54	61	54	16.000	5,95
40201022	SHE-22	22	60	225	29	60	50	61	71	61	19.000	7,87

Kito gaffelhaak / gesmede veiligheidsklep / grade 100 | EN 1677-2
Kito clevis sling hook / forged safety latch / grade 100 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	D	PxL	R	G	H	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40202006	SHC-6	6	7	18	7,4x16,5	69	16,5	20	25	19	1.400	0,27
40202008	SHC-7/8	7/8	9	25	9,6x23	95	19	28	32	26	2.500	0,61
40202010	SHC-10	10	11,5	30	12,5x29,5	109	25	33	39	31	4.000	1,12
40202013	SHC-13	13	14,5	38	16x37	135	30	40	48	39	6.700	2,05
40202016	SHC-16	16	17,5	44	20x52	155	37	47	55	45	10.000	3,40
40202020	SHC-19/20	19/20	23	52	24x73	183	51	50	61	53	16.000	6,26
40202022	SHC-22	22	25	60	27x71	212	50	61	71	61	19.000	8,76

Kito hijsmateriaal G100
Kito lifting gear G100


Kito self-locking haak / oog / grade 100
Kito eye self-locking hook / grade 100

| EN 1677-3
| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	R	E	F	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40252006	SKE-6	6	35	110	11	21	16	21	28	1.400	0,53
40252008	SKE-7/8	7/8	43,5	136	12	27	20	26	34	2.500	0,89
40252010	SKE-10	10	56	168,5	15	34,5	24,5	30	45	4.000	1,58
40252013	SKE-13	13	69	205	20	40	34,5	40	51,5	6.700	3,16
40252016	SKE-16	16	80	251,5	27	50	35,5	50	60	10.000	6,05
40252020	SKE-19/20	19/20	101	306	30	60	46	61	77	16.000	11,00
40252022	SKE-22	22	110	340	32	70	51	67	84	19.000	15,00


Kito self-locking haak / gaffel / grade 100
Kito clevis self-locking hook / grade 100

| EN 1677-3
| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	D	PxL	R	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40254006	SKC-6	6	6,7	35	7,4x16,5	94	16	21	28	1.400	0,50
40254008	SKC-7/8	7/8	8,5	43,5	9,6x23	123	20	26	34	2.500	0,96
40254010	SKC-10	10	12	56	12,5x29,5	143	24,5	30	45	4.000	1,60
40254013	SKC-13	13	15	69	16x37	180	34,5	40	51,5	6.700	3,13
40254016	SKC-16	16	19	80	20x52	217	35,5	50	60	10.000	5,80
40254020	SKC-19/20	19/20	22	101	24x73	272	46	61	77	16.000	11,40
40254022	SKC-22	22	25	110	27x71	300	51	67	84	19.000	15,20


Kito hijsmateriaal G100
Kito lifting gear G100

Kito self-locking haak / warteloog / grade 100
Kito swivel self-locking hook / grade 100

| EN 1677-3
| EN 1677-3

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	R	E	F	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40255006	SKS-6	6	35	160	13	35	16	20,5	28	1.400	0,80
40255008	SKS-7/8	7/8	43,5	181	13	35	20	26	34	2.500	1,10
40255010	SKS-10	10	56	218	16	42	24,5	30	45	4.000	2,00
40255013	SKS-13	13	69	269	20	49	34,5	40	51,5	6.700	4,00
40255016	SKS-16	16	80	321	24	60	35,5	50	60	10.000	7,30

Kito inkorthaak / oog / grade 100
Kito eye grab hook / grade 100

| EN 1677-1
| EN 1677-1

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	R	E	F	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
40302006	GSE-6	6	56	9,5	12,5	17,5	7	1.400	0,23
40302008	GSE-7/8	7/8	74,5	13	16,5	23,5	9,5	2.500	0,54
40302010	GSE-10	10	93	16	21	29	12	4.000	1,06
40302013	GSE-13	13	121	20,5	27,5	38,5	15,5	6.700	2,39
40302016	GSE-16	16	148,5	25	33,5	48	18,5	10.000	4,48
40302020	GSE-19/20	19/20	176,5	30	40	56,5	22	16.000	6,65
40302022	GSE-22	22	194,5	33	44	62	26	19.000	8,75

Kito hijsmateriaal G100
Kito lifting gear G100


Kito inkorthaak / gaffel / grade 100
Kito clevis grab hook / grade 100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	PxL	R	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg/piece
40301006	GSC-6	6	7	7,4x16,5	51	17,5	7	1.400	0,25
40301008	GSC-7/8	7/8	9	9,6x23	66	23,5	9,5	2.500	0,60
40301010	GSC-10	10	11,5	12,5x29,5	82	29	12	4.000	1,14
40301013	GSC-13	13	15	16x37	107	38,5	15,5	6.700	2,60
40301016	GSC-16	16	18	20x52	132	48	18,5	10.000	4,80
40301020	GSC-19/20	19/20	23	24x73	155	56,5	22	16.000	7,20
40301022	GSC-22	22	25	27x71	170,5	62	26	19.000	9,50


Kito gieterijhaak / grade 100
Kito foundry hook / grade 100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	R	E	F	G	H	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40351008	FHE-7/8	7/8	122,5	13,5	18	26	31	64	2.500	1,13
40351010	FHE-10	10	149	16	22	32	36	78	4.000	1,99
40351013	FHE-13	13	176,5	19	27	39	43	89	6.700	3,31
40351016	FHE-16	16	205	24	32	45	50	100	10.000	5,30

Kito hijsmateriaal G100
Kito lifting gear G100

Identificatieplaatje / grade 100
Identification tag / grade 100



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
50955210	zonder ring / without ring	leng / 1 leg	0,12
50955220	zonder ring / without ring	2-3-4 sprong / 2-3-4 legs	0,12
50955230	met ring / with ring	leng / 1 leg	0,15
50955240	met ring / with ring	2-3-4 sprong / 2-3-4 legs	0,15

Kito gesmede klepset voor Kito haak
Kito forged latch set for Kito sling hook

| Inhoud set: klep, veer en stift
| Set contains: latch, spring and pin



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
40801006	FSL-6	WA-29U & WA-79U - SHE-6 & SHC-6	0,03
40801008	FSL-7/8	WA-30U & WA-80U - SHE-7/8 & SHC-7/8	0,04
40801010	FSL-10	WA-31U & WA-81U - SHE-10 & SHC-10	0,06
40801013	FSL-13	WA-32U & WA-82U - SHE-13 & SHC-13	0,10
40801016	FSL-16	WA-33U & WA-83U - SHE-16 & SHC-16	0,14
40801020	FSL-20	WA-34U & WA-84U - SHE-19/20 & SHC-19/20	0,32
40801022	FSL-22	WA-35U & WA-85U - SHE-22 & SHC-22	0,48

Kito hijsmateriaal G100
Kito lifting gear G100

Kito palset voor Kito self-locking haak
Kito locking devise set for Kito self locking hook

| Inhoud set: pal, veer en stift
| Set contains: locking devise, spring and pin



Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
40802006	LDN-6	SNE/SNC-6 & SKE/SKC/SKS-6	0,03
40802008	LDN-7/8	SNE/SNC-7/8 & SKE/SKC/SKS-7/8	0,04
40802010	LDN-10	SNE/SNC-10 & SKE/SKC/SKS-10	0,06
40802013	LDN-13	SNE/SNC-13 & SKE/SKC/SKS-13	0,10
40802016	LDN-16	SNE/SNC-16 & SKE/SKC/SKS-16	0,14

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis handkettingtakel
Lewis chain block

| Standaard hijshoogte 3 meter
| Standard lift 3 metres



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

DK = diameter ketting
DK = diameter chain

kl = kleur
kl = colour

Artikelnr.	Type	WLL	DK	kl	kg/stuk
Part no.		ton	mm	kl	kg/piece
48101005	L-CB-S05	0,5	6x18 (1x)	rood / red	10
48101010	L-CB-S10	1,0	6x18 (1x)	rood / red	12
48101020	L-CB-S20	2,0	8x24 (1x)	rood / red	20
48101030	L-CB-S30	3,0	8x24 (2x)	rood / red	27
48101050	L-CB-S50	5,0	10x30 (2x)	rood / red	46
48101100	L-CB-S100	10,0	10x30 (4x)	rood / red	83
4880101405	L-CB-B05 (body)	0,5	6x18 (1x)	zwart / black	10
4880101410	L-CB-B10 (body)	1,0	6x18 (1x)	zwart / black	12

Lewis rateltakel
Lewis lever block

| Standaard hijshoogte 1,5 meter
| Standard lift 1,5 metres



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

DK = diameter ketting
DK = diameter chain

Artikelnr.	Type	WLL	DK	kg/stuk
Part no.		ton	mm	kg/piece
482010025	L-LB-A025	0,25	4x12 (1x)	2,1
48201005	L-LB-A05	0,50	5x15 (1x)	3
482010075	L-LB-S075	0,75	6x18 (1x)	7
48201015	L-LB-S15	1,5	8x24 (1x)	11
48201030	L-LB-S30	3,0	10x30 (1x)	21
48201060	L-LB-S60	6,0	10x30 (2x)	31
48201090	L-LB-S90	9,0	10x30 (3x)	46

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis sjortakel / stompe haken
Lewis lever block / lashing hooks

| Standaard hijshoogte 1,5 meter
| Standard lift 1,5 metres



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

DK = diameter ketting
DK = diameter chain

LC = lashing capaciteit
LC = lashing capacity

Artikelnr.	Type	WLL	DK	LC	kg/stuk
Part no.		ton	mm	kg	kg/piece
48221015	L-LB-L15	1,5	8x24 (1x)	3.000	11
48221030	L-LB-L30	3,0	10x30 (1x)	6.000	21

Lewis loopkat
Lewis plain trolley



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	WLL	Min	Max	kg/stuk
Part no.		ton	mm	mm	kg/piece
48341005	L-PT-S05	0,5	50	220	5
48341010	L-PT-S10	1,0	58	220	8,7
48341020	L-PT-S20	2,0	66	220	13,9
48341030	L-PT-S30	3,0	74	220	23
48341050	L-PT-S50	5,0	90	220.	40

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis balkklem
Lewis beam clamp

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

kl = kleur
kl = colour




Artikelnr.	Type	WLL	kl	Min	Max	kg/stuk
Part no.		ton	kl	mm	mm	kg/piece
48301010	L-BC-S10	1,0	rood / red	75	220	4,5
48301020	L-BC-S20	2,0	rood / red	75	220	5
48301030	L-BC-S30	3,0	rood / red	80	320	10
48301050	L-BC-S50	5,0	rood / red	80	320	11
48321020	L-BC-B20	2,0	zwart / black	75	220	5

Lewis takelketting / grade 80 / verzinkt
Lewis hoist chain / grade 80 / electro galvanised

| EN 818-7

| EN 818-7

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	D	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
489090500412	4	13,2	5,2	12,0	500	36
489090500618	6	19,8	7,8	18,0	1.150	80
48909050063191	6,3	22,0	7,8	19,1	1.300	86
489090500721	7	23,1	8,7	21,0	1.500	108
4890905007212	7,1	25,0	8,8	21,2	1.600	108
489090500824	8	27,2	9,6	24,0	2.000	149
489090500927	9	29,7	11,5	27,0	2.500	185
489090501030	10	34,0	12,0	30,0	3.200	219
489090550618	6 (zwart) / 6 (black)	20,4	7,2	18,0	1.150	80


Lewis bedieningsketting
Lewis hand chain



d = diameter
d = diameter

kl = kleur
kl = colour

Artikelnr.	d	a	b	kl	kg/100m
Part no.	mm	mm	mm	kl	kg/100m
489090100525	5.	25.	7,05.		36.
489090150525	5	25	7,05	zwart / black	36



Lewis staaldraadtrekker
Lewis wire rope pulling hoist

| Inclusief 20 meter staaldraad
| Including 20 meter wire rope



WLL = veilige belasting
WLL = working load limit

d = voor kabel in mm
d = for steel wire rope

Artikelnr.	Type	WLL	d	kg/stuk
Part no.		ton	mm	kg/piece
4850100800	L-PH-0800	0,8	8,3	6
4850101600	L-PH-1600	1,6	11,0	12
4850103200	L-PH-3200	3,2	16,0	23



Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks


Lewis draadspankikker
Lewis steel wire rope grip puller

| Voor maximale treksterkte van 1770 N/mm²
| For maximum tensile strength of 1770 N/mm²



a = voor kabel
a = for steel wire rope

LC = lashing capaciteit
LC = lashing capacity



Artikelnr.	Type	A	D	a	B	C	LC	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
4856100500	L-DSK-05	55	16	1-10	131	16	500	0,45
4856101000	L-DSK-10	71	37	2,5-16	189	25	1000	0,75
4856102000	L-DSK-20	91	42	4-22	248	25	2000	1,5
4856103000	L-DSK-30	129	50	16-32	296	30	3000	2,5

Lewis bovenhaak voor Lewis handkettingtakel / grade 80
Lewis top hook for Lewis chain block / grade 80

WLL = veilige belasting
WLL = working load limit



Artikelnr.	Voor type	WLL	kg/stuk
Part no.	For type	ton	kg/piece
4890101023005	L-CB-S05	0,5	0,36
4890101023010	L-CB-S10	1,0	0,62
4890101023020	L-CB-S20	2,0	1,14
4890101023030	L-CB-S30	3,0	2,45
4890101023050	L-CB-S50	5,0	3,30
4890101023100	L-CB-S100	10,0	15,15

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis onderhaak voor Lewis handkettingtakel / grade 80
Lewis bottom hook for Lewis chain hoist / grade 80

WLL = veilige belasting
WLL = working load limit



Artikelnr.	Voor type	WLL	kg/stuk
Part no.	For type	ton	kg/piece
4890101007005	L-CB-S05	0,5	0,34
4890101007010	L-CB-S10	1,0	0,65
4890101007020	L-CB-S20	2,0	1,18
4890101007030	L-CB-S30	3,0	3,22
4890101007050	L-CB-S50	5,0	4,86
4890101007100	L-CB-S100	10,0	18,66

Lewis gesmede klepset voor Lewis handkettingtakel
Lewis forged latch set for Lewis chain hoist

| Inhoud set: klep, veer en stift
| Set contains: latch, spring and pin



Artikelnr.	Voor type	kg/stuk
Part no.	For type	kg/piece
4890101008005	L-CB-S05	0,03
4890101008010	L-CB-S10	0,04
4890101008020	L-CB-S20	0,06
4890101008030	L-CB-S30	0,10
4890101008050	L-CB-S50	0,14
4890101008100	L-CB-S100	0,20

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis remschijf voor Lewis handkettingtakel
Lewis friction disk for Lewis chain hoist



Artikelnr.	Voor type	kg/stuk
Part no.	For type	kg/piece
4890101028005	L-CB-S05	0,02
4890101028010	L-CB-S10	0,04
4890101028030	L-CB-S20 & L-CB-S30	0,06
4890101028100	L-CB-S50 & L-CB-S100	0,09

Lewis bovenhaak voor Lewis rateltakel / grade 80
Lewis top hook for Lewis lever block / grade 80



WLL = veilige belasting
WLL = working load limit



Artikelnr.	Voor type	WLL	kg/stuk
Part no.	For type	ton	kg/piece
4890201031025	L-LB-S025	0,25	0,24
4890201031075	L-LB-S075	0,75	0,49
489020103115	L-LB-S15	1,5	0,93
489020103130	L-LB-S30	3,0	2,07
489020103160	L-LB-S60	6,0	4,60
489020103190	L-LB-S90	9,0	9,90

Lewis onderhaak voor Lewis rateltakel / grade 80
Lewis bottom hook for Lewis lever block / grade 80



WLL = veilige belasting
WLL = working load limit



Artikelnr.	Voor type	WLL	kg/stuk
Part no.	For type	ton	kg/piece
4890201033025	L-LB-S025	0,25	0,23
4890201033075	L-LB-S075	0,75	0,53
489020103315	L-LB-S15	1,5	0,96
489020103330	L-LB-S30	3,0	2,23
489020103360	L-LB-S60	6,0	6,65
489020103390	L-LB-S90	9,0	10

Lewis gesmede klepset voor Lewis rateltakel
Lewis forged latch set for Lewis lever block

| Inhoud set: klep, veer en stift
| Set contains: latch, spring and pin



Artikelnr.	Voor type	kg/stuk
Part no.	For type	kg/piece
4890201061025	L-LB-S025	0,02
4890201061075	L-LB-S075	0,04
489020106115	L-LB-S15	0,06
489020106130	L-LB-S30	0,10
489020106160	L-LB-S60	0,14
489020106190	L-LB-S90	0,20

Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

Lewis remschijf voor Lewis rateltakel
Lewis friction disk for Lewis lever block



Artikelnr.	Voor type	kg/stuk
Part no.	For type	kg/piece
4890201017025	L-LB-S025	0,01
4890201017075	L-LB-S075	0,04
489020101715	L-LB-S15	0,05
489020101790	L-LB-S30 & L-LB-S60 & L-LB-S90	0,09

Lewis bovenhaak voor Lewis sjortakel / grade 80
Lewis top hook for Lewis lashing lever block / grade 80



WLL = veilige belasting
WLL = working load limit

LC = lashing capaciteit
LC = lashing capacity

Artikelnr.	Voor type	WLL	LC	kg/stuk
Part no.	For type	ton	kg	kg/piece
489022103115	L-LB-L15	1,5	3.000	0,93
489022103130	L-LB-L30	3,0	6.000	2,07

Lewis onderhaak voor Lewis sjortakel / grade 80
Lewis bottom hook for Lewis lashing block / grade 80



WLL = veilige belasting
WLL = working load limit

LC = lashing capaciteit
LC = lashing capacity

Artikelnr.	Voor type	WLL	LC	kg/stuk
Part no.	For type	ton	kg	kg/piece
489022103315	L-LB-L15	1,5	3.000	0,96
489022103330	L-LB-L30	3,0	6.000	2,23

Lewis kettingzak voor Lewis handkettingtakel
Lewis chain bag for Lewis chain block




Artikelnr.	Voor type	Capaciteit	kg/stuk
Part no.	For type	Capacity	kg/piece
48109010	L-CB-B05/S05 & L-CB-B10/S10	6mmx12m	0,6
48109020	L-CB-S20	8mmx12m	0,7

Lewis klapblok / enkele schijf
Lewis snatch block / single sheave

| Met haak
| With hook

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

d = voor kabel in mm
d = for steel wire rope



Artikelnr.	WLL	d	A	D	B	C	E	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	kg/piece
486010100200	2	10	241	22	76	63	74	2,35
486010100400	4	12	360	34,5	108	82,5	104,5	6,33
486010100800	8	20	525	40,5	152	93	150	16,7


Takels / loopkatten / balkklemmen / blokken
Chainblocks / trolleys / beam clamps / blocks

BMM blok / enkele schijf
BMM block / single sheave

| met oog
| with eye

WLL = veilige belasting (5:1)
WLL = working load limit (5:1)

d = voor kabel in mm
d = for steel wire rope



Artikelnr.	WLL	d	A	D	B	C	E	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	kg/piece
38191001	1	16	228	22	84	50	80	1,7
38191002	2	18	289	24	114	52	110	3,1
38191003	3	20	367	28	154	67	150	6,4
38191006	6	24	518	42	214	85	210	17,0


Sluitingen Shackles

Lewis hoogwaardige harpsluiting / moerbout Lewis high tensile bow shackle / safety pin

| Gelijkend US Fed. Spec. RR-C-271

| Generally according to US Fed. Spec. RR-C-271

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	B	b	p	L	l	k	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
541020005	0,5	8	7	12	33	20	38	48	29	17	0,07
5410200075	0,75	10	9	13	38	21	43	54	31	21	0,13
54102001	1	11	10	17	46	26	52	65	36	25	0,17
541020015	1,5	12	11	18	51	29	58	74	43	27	0,25
54102002	2	16	13	21	58	32	67	83	48	30	0,44
5410200325	3,25	19	16	27	75	43	85	106	60	39	0,79
5410200475	4,75	22	19	32	89	50	100	125	71	47	1,26
541020065	6,5	25	22	38	102	58	120	148	84	53	1,9
541020085	8,5	28	25	44	118	68	137	165	95	59	2,8
541020095	9,5	32	29	49	132	74	155	188	108	68	3,9
54102012	12	35	32	51	147	83	163	208	121	75	5,3
541020135	13,5	38	35	57	162	92	180	230	132	82	6,95
54102017	17	42	38	63	174	98	193	246	145	91	8,85
54102025	25	50	45	74	216	126	220	298	178	104	15
54102035	35	56	52	84	252	145	250	338	197	122	19,5
54102055	55	70	67	107	318	180	310	443	260	145	39

Sluitingen
Shackles

Lewis hoogwaardige harpsluiting / borstbout
Lewis high tensile bow shackle / screw collar pin

| Gelijkend US Fed. Spec. RR-C-271
| Generally according to US Fed. Spec. RR-C-271

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	B	b	p	L	l	k	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
5410100033	0,33	6	5	10	26	15	30	38	22	15	0,02
541010005	0,5	8	7	12	33	20	38	48	29	17	0,07
5410100075	0,75	10	9	13	38	21	43	54	31	21	0,13
54101001	1	11	10	17	46	26	52	65	36	25	0,17
541010015	1,5	12	11	18	51	29	58	74	43	27	0,25
54101002	2	16	13	21	58	32	67	83	48	30	0,44
5410100325	3,25	19	16	27	75	43	85	106	60	39	0,79
5410100475	4,75	22	19	32	89	50	100	125	71	47	1,26
541010065	6,5	25	22	38	102	58	120	148	84	53	1,58
541010085	8,5	28	25	44	118	68	137	165	95	59	2,3
541010095	9,5	32	29	49	132	74	155	188	108	68	3,1
54101012	12	35	32	51	147	83	163	208	121	75	4,35

Lewis hoogwaardige D-sluiting / moerbout
Lewis high tensile dee shackle / safety pin

| Gelijkend US Fed. Spec. RR-C-271
| Generally according to US Fed. Spec. RR-C-271

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	B	b	p	L	k	l	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
54202002	2	16	13	20	46	20	73	76	31	41	0,32
5420200325	3,25	19	17	26	59	26	94	97	40	50	0,63

Sluitingen
Shackles

Lewis hoogwaardige D-sluiting / borstbout
Lewis high tensile dee shackle / screw collar pin

| Gelijkend US Fed. Spec. RR-C-271
| Generally according to US Fed. Spec. RR-C-271

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	kg/piece
5420100075	0,75	8	9	12	25	0,08
54201001	1	10	11	15	31	0,13
542010015	1,5	12	13	18	36	0,19
54201002	2	13	16	20	40	0,30
5420100325	3,25	17	19	25	51	0,59

Lewis hoogwaardige harpsluiting / moerbout / zwart
Lewis high tensile bow shackle / safety pin / black

| Gelijkend US Fed. Spec. RR-C-271
| Generally according to US Fed. Spec. RR-C-271

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)



Artikelnr.	WLL	D	d	a	B	b	p	L	l	k	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
5410600325	3,25	19	16	27	75	43	85	106	60	39	0,79

Sluitingen Shackles

Lewis hoogwaardige harpsluiting / borstbout / zwart
Lewis high tensile bow shackle / screw collar pin / black


| Gelijkend US Fed. Spec. RR-C-271

| Generally according to US Fed. Spec. RR-C-271



WLL = veilige belasting (6:1)
WLL = working load limit (6:1)

Artikelnr.	WLL	D	d	a	B	b	p	L	l	k	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
541040005	0,5	8	7	12	33	20	38	48	29	17	0,07
5410400075	0,75	10	9	13	38	21	43	54	31	21	0,13
541040001	1	11	10	17	46	26	52	65	36	25	0,17
541040015	1,5	12	11	18	51	29	58	74	43	27	0,25
541040002	2	16	13	21	58	32	67	83	48	30	0,44
5410400325	3,25	19	16	27	75	43	85	106	60	39	0,79




Sluitingen Shackles

Green Pin standaard harpsluiting / moerbout
Green Pin standard bow shackle / safety pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	2r	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	kg/piece
33020202	0,5	7	8	12	20	29	0,07
33020204	0,75	9	10	13,5	21	32	0,13
33020206	1	10	11	17	26	36,5	0,17
33020208	1,5	11	12	18,5	29	43	0,25
33020210	2	13,5	16	22	32	51	0,44
33020212	3,25	16	19	27	43	64	0,79
33020214	4,75	19	22	31	51	76	1,26
33020216	6,5	22	25	36	58	83	1,88
33020218	8,5	25	28	43	68	95	2,78
33020220	9,5	28	32	47	75	108	3,87
33020222	12	32	35	51	83	115	5,26
33020224	13,5	35	38	57	92	133	6,94
33020226	17	38	42	60	99	146	8,79
33020228	25	45	50	74	126	178	14,99
33020230	35	50	57	83	138	197	20,65
33020232	42,5	57	65	95	160	222	29,01
33020234	55	65	70	105	180	260	41,05
33020236	85	75	80	127	190	330	62,24

Sluitingen
Shackles

Green Pin standaard harpsluiting / borstbout
Green Pin standard bow shackle / screw collar pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	2r	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	kg/piece
33020101	0,33	5	6	9,5	16	22	0,02
33020102	0,5	7	8	12	20	29	0,06
33020104	0,75	9	10	13,5	21	32	0,11
33020106	1	10	11	17	26	36,5	0,15
33020108	1,5	11	12	18,5	29	43	0,21
33020110	2	13,5	16	22	32	51	0,37
33020112	3,25	16	19	27	43	64	0,65
33020114	4,75	19	22	31	51	76	1,06
33020116	6,5	22	25	36	58	83	1,56
33020118	8,5	25	28	43	68	95	2,32
33020120	9,5	28	32	47	75	108	3,28
33020122	12	32	35	51	83	115	4,51
33020124	13,5	35	38	57	92	133	5,93
33020126	17	38	42	60	99	146	7,89
33020128	25	45	50	74	126	178	13,4
33020130	35	50	57	83	138	197	18,85

Sluitingen Shackles

Green Pin standaard D-sluiting / moerbout
Green Pin standard dee shackle / safety pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	kg/piece
33010210	2	13,5	16	22	43	0,44
33010212	3,25	16	19	27	51	0,79
33010214	4,75	19	22	31	59	1,26
33010216	6,5	22	25	36	73	1,88
33010218	8,5	25	28	43	85	2,78
33010220	9,5	28	32	47	90	3,87
33010222	12	32	35	51	94	5,26
33010224	13,5	35	38	57	115	6,94
33010226	17	38	42	60	127	8,79
33010228	25	45	50	74	149	14,99
33010230	35	50	57	83	171	20,65
33010232	42,5	57	65	95	190	29,01
33010234	55	65	70	105	203	41,05

Sluitingen
Shackles

Green Pin standaard D-sluiting / borstbout
Green Pin standard dee shackle / screw collar pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	kg/piece
33010101	0,33	5	6	9,5	19	0,02
33010102	0,5	7	8	12	25	0,06
33010104	0,75	9	10	13,5	27	0,11
33010106	1	10	11	17	31	0,15
33010108	1,5	11	12	18,5	37	0,21
33010110	2	13,5	16	22	43	0,37
33010112	3,25	16	19	27	51	0,65
33010114	4,75	19	22	31	59	1,06
33010116	6,5	22	25	36	73	1,56
33010118	8,5	25	28	43	85	2,32
33010120	9,5	28	32	47	90	3,28
33010122	12	32	35	51	94	4,51
33010124	13,5	35	38	57	115	5,93
33010126	17	38	42	60	127	7,89
33010128	25	45	50	74	149	13,40
33010130	35	50	57	83	171	18,85

Sluitingen
Shackles

Green Pin visserij harpsluiting / vierkante kop
Green Pin trawling bow shackle / square head pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	2r	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	kg/piece
33020310	2	13	16	22	32	51	0,34
33020312	3,25	16	19	27	43	64	0,63
33020314	4,75	19	22	31	51	76	0,95
33020316	6,5	22	25	36	58	83	1,55
33020318	8,5	25	28	43	68	95	2,3
33020320	9,5	28	32	47	75	108	3,24
33020322	12	32	35	51	83	115	4,4

Green Pin harpsluiting / verzonken kop / vierkant gat
Green Pin bow shackle / pin with square sunken hole

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)



Artikelnr.	WLL	D	d	a	2r	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	mm	kg/piece
33020516	2	13	16	22	32	43	0,34
33020519	3,25	16	19	27	43	64	0,61
33020522	4,75	19	22	31	51	76	0,98
33020525	6,5	22	25	36	58	83	1,46
33020528	8,5	25	28	43	68	95	2,18
33020532	9,5	28	32	47	75	108	3,09


Sluitingen
Shackles

Green Pin visserij D-sluiting / vierkante kop
Green Pin trawling dee shackle / square head pin

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised



WLL = veilige belasting (6:1)
WLL = working load limit (6:1)




Artikelnr.	WLL	D	d	a	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	kg/piece
33010310	2	13	16	22	43	0,34
33010312	3,25	16	19	27	51	0,63
33010314	4,75	19	22	31	59	0,95
33010316	6,5	22	25	36	73	1,55
33010318	8,5	25	28	43	85	2,3
33010320	9,5	28	32	47	90	3,24
33010322	12	32	35	51	94	4,4

Green Pin D-sluiting / verzonken kop / vierkant gat
Green Pin dee shackle / pin with square sunken hole

| Hoogwaardig staal / verzinkt
| High tensile steel / galvanised



WLL = veilige belasting (6:1)
WLL = working load limit (6:1)



Artikelnr.	WLL	D	d	a	C	kg/stuk
Part no.	ton	mm	mm	mm	mm	kg/piece
33010516	2	13	16	22	43	0,32
33010519	3,25	16	19	27	51	0,55
33010522	4,75	19	22	31	59	0,88
33010525	6,5	22	25	36	73	1,37
33010528	8,5	25	28	43	85	2,05
33010532	9,5	28	32	47	90	2,84

Sleutel voor Green Pin vierkant gat sluiting
Tool for Green Pin shackles / square sunken hole pin




Artikelnr.	Voor type	kg/stuk
Part no.	For type	kg/piece
33080010	2 - 3,25 - 4,75	0,200
33080012	6,5 - 8,5	0,300
33080016	9,5	0,400



RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen hijsketting / grade 60
Stainless lifting chain / grade 60




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
44051005	5	18,5	6,5	15	600	54
44051006	6	22,2	7,8	18	900	80
44051008	8	29,6	10,4	24	1.500	140
44051010	10	37,0	13,0	30	2.400	220
44051013	13	48,1	16,9	39	3.850	380

Roestvast stalen verbindingsschalm / grade 60
Stainless connecting link / grade 60



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	R	G	H	L	O	P	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
44101006	6	45	7,5	8	41	14	5	900	0,08
44101008	8	62	10	11,5	56	19	6	1.500	0,2
44101010	10	90	12,6	12,6	66	28	7,5	2.400	0,35
44101013	13	87,5	16,7	19	84	28	9	4.250	0,73


RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen omegaschalm / grade 60
Stainless omega shackle / grade 60



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	DK	A	C	F	WLL	kg/stuk
Part no.	mm	mm	mm	mm	kg	kg/piece
44103006	6	7	20	26	900	0,16
44103008	7/8	9	23	30	1.500	0,23
44103010	10	11	28	40	2.400	0,46
44103013	13	14	38	48	3.850	0,68
44103016	16	17	42	53	6.000	1,20


RVS topschalm / 1/2-sprong / grade 60
Stainless masterlink / 1/2 legs / grade 60



DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg

DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	kg	kg/piece
44152005	5	4	10	50	80	600	0,15
44152008	6/7/8	5/6	13	60	110	1.500	0,34
44152010	10	7/8	16	60	110	2.400	0,53
4415201010	-	10	18	75	135	3.350	0,80
44152016	13/16	13	22	90	160	6.000	1,50
44152018	18	16	26	100	180	8.000	2,3

RVS hijsmateriaal
Stainless lifting gear

RVS topschalm / 3/4-sprong / grade 60
Stainless masterlink / 3/4 legs / grade 60

DK = diameter ketting
DK = diameter chain


WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	DK	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
44154005	5	13	10	60	25	110	44	1.250	0,52
44154006	6/7	16	13	60	25	110	54	2.500	0,97
44154008	8	18	16	75	34	135	70	3.150	1,6
44154010	10	22	18	90	40	160	85	5.000	2,76
44154013	13	26	22	100	50	180	115	8.000	4,45
44154016	16	32	26	110	65	200	140	10.000	7,55

RVS topschalm / 3/4-sprong / grote ringen / grade 60
Stainless masterlink / 3/4 legs / big links / grade 60

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	kg	kg/piece
4415601613	16	13	60	60	110	110	1.800	1,21
4415601616	16	16	60	60	110	110	2.400	1,59
4415601816	18	16	75	60	135	110	3.250	1,86
4415602218	22	18	90	75	160	135	5.000	3,1


RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen ooghaak / grade 60
Stainless eye sling hook / grade 60



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	DK	D	D1	B	H	h	O	O1	bo	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
44201006	6	8	13,5	72	21	90	25	23	21	900	0,31
44201008	7/8	13	19,5	103	29	118	32	30	27	1.600	0,81
44201010	10	15	27	120	33	140	39	37	37	2.500	1,57
44201013	13	18	35	160	46	182	51	49	48	4.250	3,1
44201016	16	24	44	183	51	213	66	64	55	6.300	5,36

Roestvast stalen gaffelhaak / grade 60
Stainless clevis sling hook / grade 60



DK = diameter ketting
DK = diameter chain


WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	DK	D	PxL	B	bg	H	h	O	O1	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
44202006	6	14	8x19,5	73	7,2	21	81	25	23	900	0,40
44202008	7/8	20	10x22,5	103	9,5	29	111	30	32	1.500	0,82
44202010	10	27	13x31,5	120	12	33	123	37	39	2.400	1,44

RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen wartelhaak / grade 60
Stainless swivel hook / grade 60




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	R	E	F	G	H	L	O	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
44204005	4/5	62	36	120	10	43	13	16	145	20	630	0,65
44204006	6	76	63	183,5	13,5	46	21	23	220	25	1.000	0,93
44204007	7	88	64	190	13,5	50	23	25	225	30	1.250	1,10
44204010	8/10	125	65	235	16,5	64	31	33	295	40	2.500	2,71

Roestvast stalen verkorter / grade 60
Stainless shortening device / grade 60



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	A	F	O	WLL	kg/stuk
Part no.	mm	mm	mm	mm	kg	kg/piece
44302006	6	47	81	10	900	0,18
44302008	7/8	70	94	12	1.500	0,38
44302010	10	80	120	15	2.400	0,71
44302013	13	91	150	20	3.850	1,18

RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen identificatieplaatje / grade 60
Stainless identification tag / grade 60




Artikelnr.	Type	kg/stuk
Part no.		kg/piece
44805000	met ring / with ring	0,10

Gecertificeerde RVS harpsluiting / moerbout
Certified stainless bow shackle / safety pin

| AISI-316 / CE-markering / veiligheidsfactor 6:1
| AISI-316 / CE-marking / safety factor 6:1

WLL = veilige belasting (6:1)
WLL = working load limit (6:1)



Artikelnr.	WLL	D	d	a	2r	C	kg/100 stuks
Part no.	ton	mm	mm	mm	mm	mm	kg/100 pieces
37180106	0,28	6	M-6	13	19	28	5,2
37180108	0,4	8	M-8	16	25	35	8,1
37180110	0,6	9,5	M-10	19	28	38	14,7
37180111	0,8	11	M-12	22	33	46	22,1
37180112	1	12,7	M-12	26	38	52	35,4
37180114	1,5	14,3	M-16	29	43	60	63,5
37180116	2,5	16	M-20	32	50	68	80,5
37180119	3	19	M-22	38	58	76	125
37180122	4	22	M-24	44	66	88	182
37180125	4,5	25,4	M-27	50	76	100	270


RVS hijsmateriaal
Stainless lifting gear

Gecertificeerde RVS D-sluiting / moerbout
Certified stainless dee shackle / safety pin

| AISI-316 / CE-markering / veiligheidsfactor 6:1
| AISI-316 / CE-marking / safety factor 6:1




WLL = veilige belasting (6:1)
WLL = working load limit (6:1)



Artikelnr.	WLL	D	d	a	C	kg/100 stuks
Part no.	ton	mm	mm	mm	mm	kg/100 pieces
37170106	0,35	6	M-6	13	25	4,8
37170108	0,5	8	M-8	16	32	7,5
37170110	0,8	9,5	M-10	19	38	13,6
37170111	1	11	M-12	22	44	21,2
37170112	1,25	12,7	M-12	26	52	33,1
37170114	1,8	14,3	M-16	29	58	58,5
37170116	2,8	16	M-20	32	64	76
37170119	3,3	19	M-22	38	76	118
37170122	4,5	22	M-24	44	88	175
37170125	5,0	25,4	M-27	50	100	260
37170128	7,5	28,6	M-33	57	114	310
37170132	10,0	31,8	M-36	64	128	435
37170135	12,0	34,9	M-39	70	140	530

RVS hijsmateriaal
Stainless lifting gear

Roestvast stalen pompenketting
Stainless pump chain




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	L	L1	l	P	L2	WLL	kg/100m
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/100m
44901004	4	15	7	35	1000	16	70	57	300	40
44901005	5	16,5	6,5	50	1000	18,5	80	47	500	64
44901006	6	20,5	8,5	60	1000	18,5	110	45	700	107
44901008	8	26,5	10,5	60	1000.	24	110	35	1250	163

Roestvast stalen aanlasoog / grade 60
Stainless attachment point / grade 60




WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	D	b	C	E	h	L	WLL	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	kg	kg/piece
444010005	8	33	22	25	35	57	500	0,18
44401001	10	45	31	35	47,5	78,5	1.000	0,28
44401002	16	60	38	50	61	99	2.000	0,86
44401003	18	70	42,5	56	74,5	117	3.000	1,275
44401005	22	81	51	65	87	138	5.000	2,135
44401008	26	93	61	75	100	161	8.000	3,55
44401010	32	105	73	85	110	183	10.000	6,015

Oogbouten / oogmoeren
Eyebolts / eyenuts

Lewis hoogwaardig stalen oogbout / grade 80
Lewis high tensile eyebolt / grade 80




WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°

Artikelnr.	A	D	B	C	E	F	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
50801006	M-6	29	17	16	6	28	13	400	0,03
50801008	M-8	36	20	20	8	36	15	800	0,06
50801010	M-10	45	25	25	10	45	18	1.000	0,11
50801012	M-12	53	30	30	12	54	22	2.000	0,18
50801014	M-14	61,5	35	35	14	63	28	3.000	0,28
50801016	M-16	62	35	35	14	63	28	4.000	0,3
50801018	M-18	71	40	40	16	72	30	5.000	0,42
50801020	M-20	71	40	40	16	72	30	6.000	0,45
50801024	M-24	90	50	50	20	90	38	8.000	0,95
50801027	M-27	90	50	50	20	90	38	10.000	0,88
50801030	M-30	109	65	60	24	108	45	12.000	1,76
50801036	M-36	128	75	70	28	126	55	16.000	2,65
50801042	M-42	147	85	80	32	144	65	24.000	4,06
50801048	M-48	168	100	90	38	166	70	32.000	6,38
50801056	M-56	187	110	100	42	184	80	40.000	8,80
50801064	M-64	203	120	110	48	206	90	50.000	12,4

Oogbouten / oogmoeren
Eyebolts / eyenuts

Lewis hoogwaardig stalen oogmoer / grade 80
Lewis high tensile eyenut / grade 80



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°

Artikelnr.	A	D	B	C	E	F	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
50802006	M-6	36	17	20	8	36	400	0,049
50802008	M-8	36	20	20	8	36	800	0,05
50802010	M-10	45	25	25	10	45	1.000	0,09
50802012	M-12	53	30	30	12	54	2.000	0,16
50802014	M-14	62	35	35	14	63	3.000	0,24
50802016	M-16	62	35	36	14	63	4.000	0,24
50802018	M-18	71	40	40	16	72	5.000	0,36
50802020	M-20	71	40	40	16	72	6.000	0,36
50802024	M-24	90	50	50	20	90	8.000	0,69
50802027	M-27	90	50	50	20	90	10.000	0,7
50802030	M-30	109	65	60	24	108	12.000	1,3

Oogbouten / oogmoeren
Eyebolts / eyenuts


Lewis hoogwaardig stalen oogbout / grade 80
Lewis high tensile eyebolt / grade 80

| Draaibaar / gelagerd
| Rotating / ball bearing



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°

WLL2 = working load limit kettingleng 90°
WLL2 = working load limit 1-leg 90°




Artikelnr.	A	D	D1	B	C	E	H	L	WLL1	WLL2	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg (90°)	kg/piece
50806008	M-8	30	36	14	45	27	96	13	600	300	0,45
50806010	M-10	30	36	14	45	27	96	18	1.000	500	0,45
50806012	M-12	30	36	14	45	27	96	18	1.000	500	0,46
50806014	M-14	30	36	14	45	27	96	20	2.000	1.120	0,45
50806016	M-16	30	36	14	45	28	97	20	2.000	1.120	0,46
50806020	M-20	35	50	16	58	40	126	30	4.000	2.000	0,96
50806024	M-24	30	57	18	63	48	151	30	6.300	3.150	1,45
50806027	M-27	40	57	20	63	48	151	35	6.300	3.150	1,47
50806030	M-30	40	66	20	69	61	166	35	10.600	5.300	2,17
50806036	M-36	50	80	22	96	68	205	53	11.800	8.000	4,17
50806042	M-42	50	80	25	96	68	205	63	15.000	10.000	6,72

Oogbouten / oogmoeren
Eyebolts / eyenuts

Cartec hoogwaardig stalen oogbout / grade 80
Cartec high tensile eyebolt / grade 80



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°




Artikelnr.	A	D	B	C	E	F	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
39503006	M-6	45	25	25	10	45	13	400	0,09
39503008	M-8	45	25	25	10	45	13	800	0,09
39503010	M-10	45	25	25	10	45	17	1.000	0,11
39503012	M-12	62	35	35	14	63	21	1.600	0,27
39503014	M-14	62	35	35	14	63	21	3.000	0,29
39503016	M-16	62	35	35	14	63	27	4.000	0,31
39503018	M-18	90	50	50	20	90	27	5.000	0,84
39503020	M-20	90	50	50	20	90	30	6.000	0,86
39503024	M-24	90	50	50	20	90	36	8.000	0,90
39503027	M-27	109	65	60	24	108	45	10.000	1,66
39503030	M-30	109	65	60	24	108	45	12.000	1,70
39503036	M-36	128	75	70	28	126	54	16.000	2,15
39503042	M-42	147	85	80	32	144	63	24.000	4,15
39503048	M-48	168	100	90	38	166	68	32.000	6,20
39503056	M-56	187	110	100	42	184	78	36.000	8,80
39503064	M-64	208	120	110	48	206	90	45.000	12,40

Oogbouten / oogmoeren
Eyebolts / eyenuts

Cartec hoogwaardig stalen oogmoer / grade 80
Cartec high tensile eyenut / grade 80



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°




Artikelnr.	A	D	B	C	E	F	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
39504006	M-6	45	25	25	10	45	400	0,1
39504008	M-8	45	25	25	10	45	800	0,1
39504010	M-10	45	25	25	10	45	1.000	0,1
39504012	M-12	62	35	35	14	63	1.600	0,26
39504014	M-14	62	35	35	14	63	3.000	0,26
39504016	M-16	62	35	35	14	63	4.000	0,26
39504018	M-18	90	50	50	20	90	5.000	0,75
39504020	M-20	90	50	50	20	90	6.000	0,75
39504024	M-24	90	50	50	20	90	8.000	0,75
39504027	M-27	109	65	60	24	108	10.000	1,4
39504030	M-30	109	65	60	24	108	12.000	1,4

Cartec hoogwaardig stalen oogbout / grade 80
Cartec high tensile eyebolt / grade 80

| Draaibaar
| Adjustable



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°



Artikelnr.	A	D	B	C	E	F	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
39505006	M-6	45	25	25	10	45	15	400	0,09
39505008	M-8	45	25	25	10	45	15	800	0,09
39505010	M-10	45	25	25	10	45	16	1.000	0,11
39505012	M-12	62	35	35	14	63	22	1.600	0,27
39505014	M-14	62	35	35	14	63	20	3.000	0,29
39505016	M-16	62	35	35	14	63	29	4.000	0,31
39505020	M-20	90	50	50	20	90	32	6.000	0,86
39505024	M-24	90	50	50	20	90	40	8.000	0,9
39505030	M-30	109	65	60	24	108	45	12.000	1,7


Oogbouten / oogmoeren Eyebolts / eyenuts

Cartec hoogwaardig stalen oogbout / grade 80
Cartec high tensile eyebolt / grade 80

| Draaibaar / gelagerd
| Rotating / ball bearing



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°



Artikelnr.	A	D	D1	B	C	E	H	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
39506010	M-10	30	38	13	46	50	105	18	600	0,48
39506012	M-12	30	38	13	46	50	105	18	1.000	0,5
39506014	M-14	30	38	13	46	50	105	20	1.000	0,5
39506016	M-16	30	38	13	46	50	105	20	2.000	0,53
39506020	M-20	30	38	13	46	50	105	30	2.000	0,53
39506024	M-24	40	58	19	70	68	153	30	6.300	1,63
39506030	M-30	40	75	20	65	80	165	35	10.600	2,23
39506036	M-36	50	85	22	90	95	205	54	12.500	5,5
39506042	M-42	50	85	22	90	95	205	63	15.000	10,0
39506048	M-48	70	120	30	120	130	280	60	25.000	10,0
39506056	M-56	70	120	30	120	130	280	78	25.000	10,0
39506064	M-64	70	120	30	120	130	280	96	25.000	10,0
39506072	M-72	68	160	40	127	165	338	108	35.000	29,0


Oogbouten / oogmoeren
Eyebolts / eyenuts

Cartec hoogwaardig stalen spanbeugel / grade 100
Cartec high tensile eyebolt / grade 100

| Draaibaar
| With clamp / rotating



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°



Artikelnr.	A	D	R	C	E	H	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
40507008	M8	34	51	43	30	78	15	300	0,27
40507010	M10	34	51	42	30	78	15	630	0,29
40507012	M12	38	52	40	36	85	23	1.000	0,50
40507016	M16	38	52	38	36	85	24	1.500	0,51
40507020	M20	55	71	54	44	111	31	2.500	1,25
40507024	M24	55	71	51	44	111	37	4.000	1,30
40507027	M27	66	86	64	63	145	37	4.000	3,15
40507030	M30	66	86	62	65	145	45	5.000	3,25
40507036T07	M36	66	86	60	55	145	50	7.000	3,30
40507036T08	M36	78	115	88	81	190	59	8.000	5,90
40507042T10	M42	78	115	86	75	190	75	10.000	6,5
40507042T15	M42	97	151	121	89	242	61	15.000	11,20
40507048	M48	97	151	117	89	242	71	20.000	11,60


Oogbouten / oogmoeren
Eyebolts / eyenuts

Cartec hoogwaardig stalen oogbout / grade 100
Cartec high tensile eyebolt / grade 100

| Draaibaar / gelagerd
| Rotating / ball bearing



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°




Artikelnr.	A	D	D1	B	C	E	H	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
40506010	M10	30	38	13	46	50	105	18	1.000	0,48
40506012	M12	30	38	13	46	50	105	18	1.400	0,50
40506016	M16	30	38	13	46	50	105	20	2.800	0,53
40506020	M20	34	50	16	57	61	131	30	5.000	1,05
40506024	M24	40	58	19	70	68	153	30	8.000	1,63
40506030	M30	40	80	20	65	71	156	35	12.000	2,85
40506036	M36	50	90	22	90	86	200	54	15.000	4,62

Cartec hoogwaardig stalen oogbout / grade 100
Cartec high tensile eyebolt / grade 100

| Draaibaar
| Adjustable



WLL1 = working load limit kettingleng 0°
WLL1 = working load limit 1-leg 0°




Artikelnr.	A	D	B	C	E	F	L	WLL1	kg/stuk
Part no.	mm	mm	mm	mm	mm	mm	mm	kg (0°)	kg/piece
40505008	M8	44,5	32	29	10	45	12	1.000	0,30
40505010	M10	44,5	32	29	10	45	16	1.000	0,30
40505012	M12	53,5	44	34	11	56	18	2.000	0,46
40505016	M16	56,5	56	39	14,5	65	24	4.000	0,90
40505020	M20	67	58	42	17	70	30	6.000	1,15
40505024	M24	80	73	52	19	88	36	8.000	2,05
40505030	M30	101	80	62	27	106	43	12.000	4,00
40505036	M36	125	95	80	38	154	54	16.000	6,70
40505042	M42	148	105	90	41	170	64	24.000	9,50
40505048	M48	165	120	95	47	185	72	32.000	13,40

Cartec hijsmateriaal G100
Cartec lifting gear G100

Cartec inkorthaak / gaffel / grade 100
Cartec clevis grab hook / grade 100

| EN 1677-1
| EN 1677-1




DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	A	PxL	B	R	C	G	H	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40301508	CFX-08	7/8	10	10x22,5	10	64,9	10,9	30	28	2.500	0,44
40301510	CFX-10	10	13	13x31,5	13	79,9	15	44	34	4.000	0,96
40301513	CFX-13	13	17	16x42	17	105,4	17,5	53	47	6.700	2,10
40301516	CFX-16	16	19	21x51,5	19	111,8	18,3	64	60	10.000	3,40
40301520	CFX-20	19/20	23,5	24x61,5	23	118	22	85	65	16.000	5,20
40301522	CFX-22	22	26	26x72	26	154	25	92	68	19.000	7,80

Cartec inkorthaak / gaffel / beveiliging / grade 100
Cartec clevis grab hook / safety device / grade 100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	A	PxL	B	R	C	G	H	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40301806	CFX-06 S	6	8	7,5x17,5	8	50,5	8,8	22	22	1.400	0,20
40301808	CFX-08 S	7/8	10	10x22,5	10	64,9	10,9	30	28	2.500	0,44
40301810	CFX-10 S	10	13	13x31,5	13	79,9	15	44	34	4.000	0,96
40301813	CFX-13 S	13	17	16x42	17	105,4	17,5	53	47	6.700	2,10
40301816	CFX-16 S	16	19	21x51,5	19	111,8	18,3	64	60	10.000	3,40

Cartec hijsmateriaal G100
Cartec lifting gear G100

Cartec inkortklauw / gaffel / grade 100

| EN 1677-1


Cartec clevis shortening clutch / grade 100

| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	A	D	PxL	B	C	E	F	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
40303006	CXX-06	6	8	8	7,5x17,5	8	10	19	45	1.400	0,21
40303008	CXX-08	8	9,5	9,5	10x22,5	9,5	10	23,5	56	2.500	0,48
40303010	CXX-10	10	12	12	13x31,5	12	14,5	32,5	78	4.000	1,12
40303013	CXX-13	13	15,5	15,5	16x42	15,5	18	44	90	6.700	1,83
40303016	CXX-16	16	19	19	21x51,5	21	21	50	106	10.000	2,83