


LEWIS
LADINGSPANNERS

LEWIS
LOADBINDERS

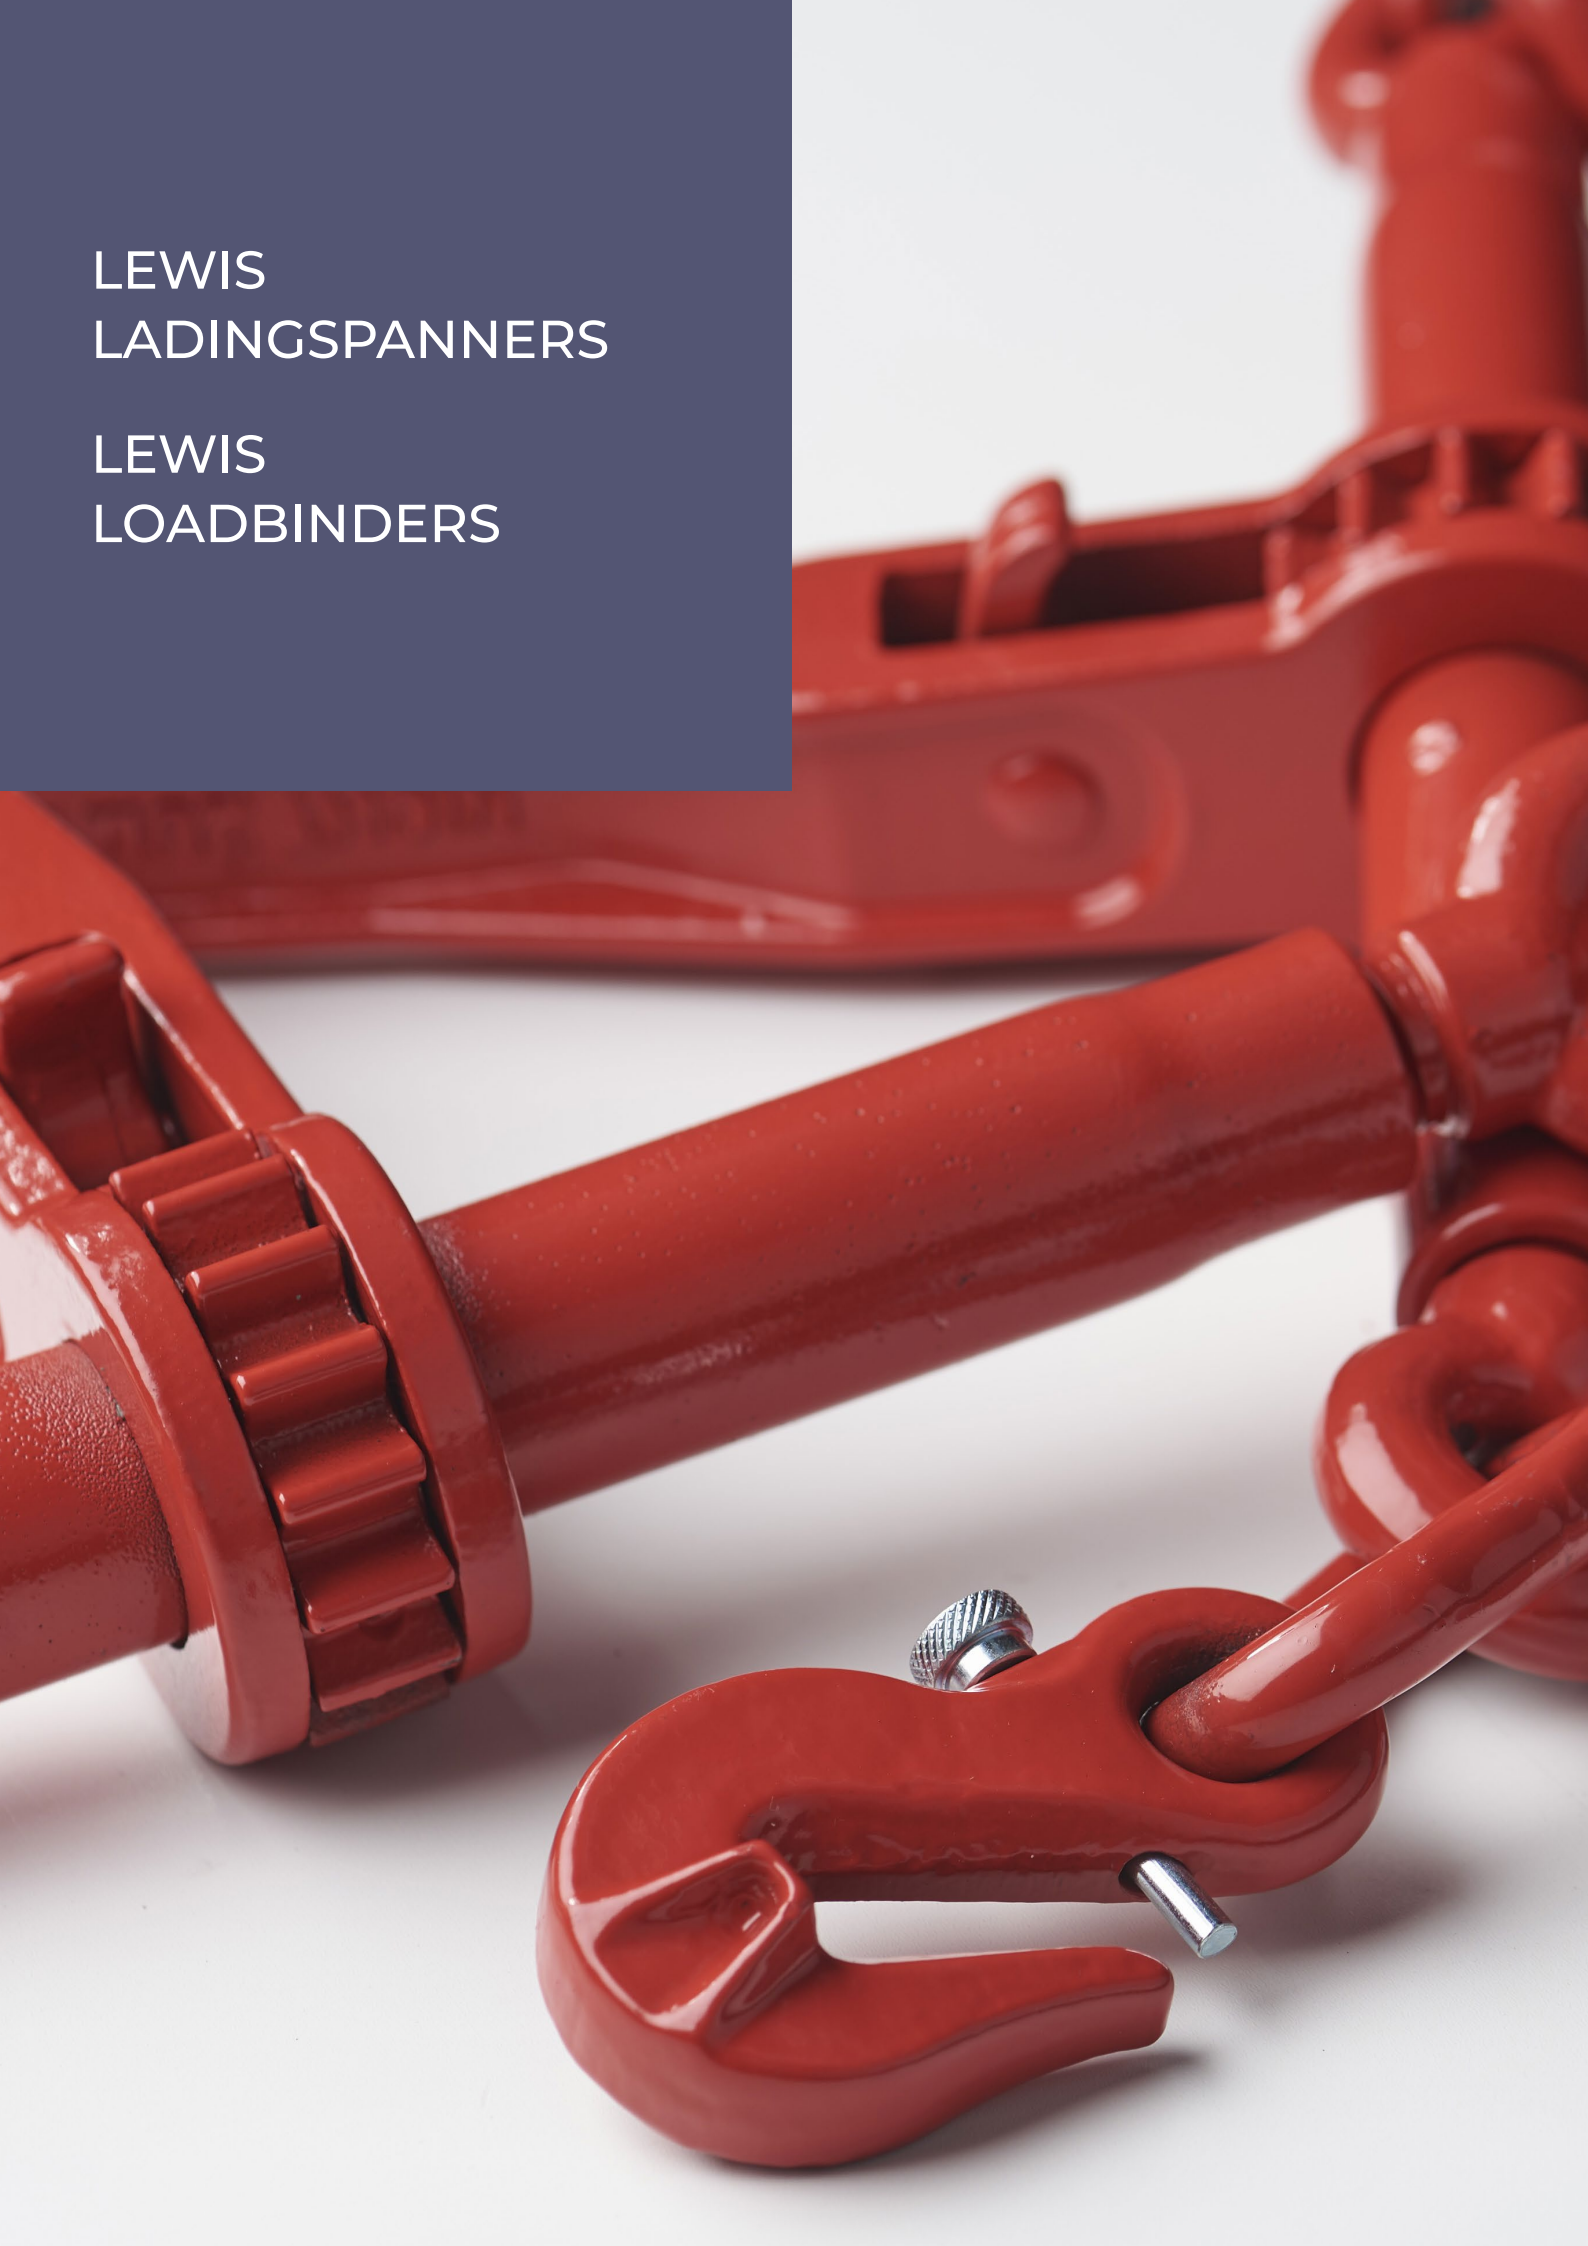

Lewis ladingspanner / ratel / standaard / G70
Lewis loadbinder with ratchet / standard / G70

| met inkorthaken
| with grab hooks




DK = diameter ketting
DK = diameter chain

LC = lashing capaciteit
LC = lashing capacity

mbl = minimum breekkracht
mbl = minimum breaking load

Artikelnr.	Type	DK	D	L	I	Min	Max	LC	mbl	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg	kg/piece
5020100810	L-LBS-810	8-10	65	390	255	570	760	2.450	8.620	4,5
5020101013	L-LBS-1013	10-13	65	390	255	580	780	4.175	15.000	5
5020101316	L-LBS-1316	13-16	65.	390.	260	670	860	5.900	20.800	7



Lewis ladingspanner / ratel / G80
Lewis loadbinder with ratchet / G80

| EN 12195-3 / met inkorthaken
| EN 12195-3 / with grab hooks




DK = diameter ketting
DK = diameter chain

LC = lashing capaciteit
LC = lashing capacity

mbl = minimum breekkracht
mbl = minimum breaking load

Artikelnr.	Type	DK	D	L	I	Min	Max	LC	mbl	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg	kg/piece
50202006	L-LBV-6	6	43	230	170	410	520	2.240	4.480	3
50202008	L-LBV-8	8	65	390	255	590	750	4.000	8.000	5
50202010	L-LBV-10	10	65	390	255	610	800	6.300	12.600	5,5
50202013	L-LBV-13	13	65.	390.	260	700	850	10.600	21.200	7,5
50202016	L-LBV-16	16	65.	390.	260	730	880	16.100	32.200	10,0



Lewis ladingspanner / ratel / G100
Lewis loadbinder with ratchet / G100

| EN 12195-3 / met inkorthaken
| EN 12195-3 / with grab hooks




DK = diameter ketting
DK = diameter chain

LC = lashing capaciteit
LC = lashing capacity

mbl = minimum breekkracht
mbl = minimum breaking load

Artikelnr.	Type	DK	D	L	I	Min	Max	LC	mbl	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg	kg/piece
52202008	L-LBVC-8	8	65	371	255	580	750	5.000	10.000	4,5
52202010	L-LBVC-10	10	65	371	255	610	780	8.000	16.000	5,55
52202013	L-LBVC-13	13	65.	371.	260	700	870	13.400	26.800	8,05



Lewis QuickBinder / uitvalbeveiliging / G80
Lewis Quickbinder / safety device / G80

| EN 12195-3 / met inkorthaken
| EN 12195-3 / with grab hooks




DK = diameter ketting
DK = diameter chain

LC = lashing capaciteit
LC = lashing capacity

mbl = minimum breekkracht
mbl = minimum breaking load

Artikelnr.	Type	DK	D	L	I	Min	Max	LC	mbl	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	kg	kg	kg/piece
50221008	L-QB-8	8	65	360	250	590	750	4.000	8.000	4,5
50221010	L-QB-10	10	65	360	250	600	790	6.300	12.600	5,5
50221013	L-QB-13	13	65	360	260	700	850	10.600	21.200	7
50221210	L-QBZ-10	10	65.	360.	250	340	520	6.300	12.600	3,5
50261210	L-QBZC-10 (G100)	10	65.	360.	250	340	520	10.000	20.000	3,5



Identificatieplaatje / lashing
Identification tag / lashing

Artikelnr.	Type	kg/stuk
Part no.		kg/piece
50955410	zonder ring / without ring	0,12
50955420	met ring / with ring	0,15

